



**Tsunami hazard
assessment in El
Salvador**

J. A. Álvarez-Gómez
et al.

This discussion paper is/has been under review for the journal Natural Hazards and Earth System Sciences (NHESS). Please refer to the corresponding final paper in NHESS if available.

Tsunami hazard assessment in El Salvador, Central America, from seismic sources through flooding numerical models

**J. A. Álvarez-Gómez^{1,2}, Í. Aniel-Quiroga², O. Q. Gutiérrez-Gutiérrez²,
J. Larreynaga³, M. González², M. Castro³, F. Gavidia³, I. Aguirre-Ayerbe²,
P. González-Riancho², and E. Carreño⁴**

¹Department of Geodynamics, Faculty of Geology, Complutense University of Madrid, C/ José Antonio Novais, s/n, 28040 Madrid, Spain

²Environmental Hydraulics Institute “IH Cantabria”, Universidad de Cantabria, C/ Isabel Torres no 15, Parque Científico y Tecnológico de Cantabria, 39011 Santander, Spain

³Department of Oceanography, General Directorate of Environmental Monitoring, Ministry of Environment and Natural Resources, C/ Las Mercedes, San Salvador, El Salvador

⁴Instituto Geográfico Nacional, C/ General Ibáñez Ibero, no 3, 28003 Madrid, Spain

Received: 3 January 2013 – Accepted: 7 May 2013 – Published: 17 May 2013

Correspondence to: J. A. Álvarez-Gómez (jaalvare@ucm.es)

Published by Copernicus Publications on behalf of the European Geosciences Union.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Abstract

El Salvador is the smallest and most densely populated country in Central America; its coast has approximately a length of 320 km, 29 municipalities and more than 700 000 inhabitants. In El Salvador there have been 15 recorded tsunamis between 1859 and 2012, 3 of them causing damages and hundreds of victims. The hazard assessment is commonly based on propagation numerical models for earthquake-generated tsunamis and can be approached from both Probabilistic and Deterministic Methods. A deterministic approximation has been applied in this study as it provides essential information for coastal planning and management. The objective of the research was twofold, on the one hand the characterization of the threat over the entire coast of El Salvador, and on the other the computation of flooding maps for the three main localities of the Salvadorian coast. For the latter we developed high resolution flooding models. For the former, due to the extension of the coastal area, we computed maximum elevation maps and from the elevation in the near-shore we computed an estimation of the run-up and the flooded area using empirical relations. We have considered local sources located in the Middle America Trench, characterized seismotectonically, and distant sources in the rest of Pacific basin, using historical and recent earthquakes and tsunamis. We used a hybrid finite differences – finite volumes numerical model in this work, based on the Linear and Non-linear Shallow Water Equations, to simulate a total of 24 earthquake generated tsunami scenarios. In the western Salvadorian coast, run-up values higher than 5 m are common, while in the eastern area, approximately from La Libertad to the Gulf of Fonseca, the run-up values are lower. The more exposed areas to flooding are the lowlands in the Lempa River delta and the Barra de Santiago Western Plains. The results of the empirical approximation used for the whole country are similar to the results obtained with the high resolution numerical modelling, being a good and fast approximation to obtain preliminary tsunami hazard estimations. In Acajutla and La Libertad, both important tourism centres being actively developed, flooding depths between 2 and 4 m are frequent, accompanied with high and very high

Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez
et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



person instability hazard. Inside the Gulf of Fonseca the impact of the waves is almost negligible.

1 Introduction

Tsunamis are a relatively infrequent phenomena representing a greater threat than earthquakes, hurricanes and tornadoes, and causing since 1850 the loss of more than 420 000 human lives and extensive damage to coastal infrastructure around the world. Advances in the understanding and forecasting of tsunami impacts allow the development of adaptation and mitigation strategies to reduce risk on coastal areas.

El Salvador is the smallest and most densely populated country in Central America. Its area covers 21 393 km² and its population reaches 5 580 000 inhabitants (DIGESTYC, 2007). The coast of El Salvador has approximately a length of 320 km, with 29 municipalities along its shore and habited by more than 700 000 people. The country is located in an area with a high seismic activity, where earthquakes, landslides and mudslides are considered major natural hazards.

In El Salvador there have been 15 recorded tsunamis between 1859 and 2012, 3 of them causing damages. On 26 February of 1902 an earthquake near the coast of Guatemala and El Salvador generated a tsunami which flooded the coast along Ahuachapán and La Paz causing the death of 185 inhabitants. On 10 March of 1957 a tsunami reached the coast of Acajutla due to the $M_W = 8.1$ Alaska earthquake. The tsunami caused damage in the Port of Acajutla which was in construction at that moment, causing loss of lives (Fernández, 2002). The most recent was on 27 August 2012, a $M_W = 7.3$ earthquake generated a small tsunami that affected the area of the Peninsula of San Juan Del Gozo, in the Jiquilisco Bay, causing damage in some infrastructure and several injured people who were working at that moment in the turtle hatcheries located near the beach.

The hazard assessment is commonly based on propagation numerical models for earthquake-generated tsunamis. This models are developed through the

Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez
et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez
et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

5 characterization of the tsunamigenic seismic sources (faults) and the numerical modelling of the tsunami wave propagation and, if needed, flooding. Tsunami hazard assessment can be approached by both Probabilistic (PTHA) and Deterministic Methods. When PTHA is performed, it is often considered as an extension of Probabilistic Seismic Hazard Assessment (PSHA) (Annaka et al., 2007; Burbidge et al., 2008; González et al., 2009; Grezio et al., 2010; Sørensen et al., 2012; Power et al., 2012), obtaining seismic return periods for potential tsunamigenic earthquakes and incorporating the aleatory uncertainties on the fault and tidal level parameters.

10 Deterministic analyses are based on worst-case scenarios, where the maximum potential tsunamigenic earthquakes are simulated. In addition, aggregated analysis combining the results obtained for a number of worst-case scenarios of tsunamis in an area can be done. A deterministic approximation has been applied in this study. This approximation provides essential information for coastal planning, engineering and management in terms of security concerns (Tinti and Armigliato, 2003).

15 Simulations of historical and potential tsunamis with greater or lesser impact to the country's coast have been developed, including distant, intermediate and near sources. 24 scenarios of different seismic sources have been generated. The result is a catalogue of hazard maps including maximum wave elevation, maximum water depth, minimum tsunami arrival time and maximum flooding level. For the whole coast of El Salvador we obtained the maximum water elevation, minimum arrival time and an estimation of the run up level and distance. At three relevant locations of the coast we developed detailed flooding models: La Libertad, Fonseca Gulf-La Unión and the western coastal plain-Acajutla. At these locations, in addition to the aforementioned maps, we obtained maps of human instability hazard, that can be defined as the hazard of drowning due to loss of stability due to the flooding depth and/or the current speed of the incoming tsunami. We used the product of both variables and classify the results in levels following a semaphore criteria (Jonkman et al., 2008).

25

2 Seismic sources

From the tsunami hazard studies point of view, tsunamigenic sources are usually classified according to their distance (temporal or spatial) with respect to the study area. The classification is simple, with near-field (or local) and far-field (or distant) sources, and occasionally in between. There is no consensus to define the boundary between the different types, although commonly used values range from 30 to 60 min of tsunami travel time as temporal limit for separation between nearby and distant sources. Occasionally a simpler distance limit can be used, for example using from 1000 to 2000 km as the limit between near-field and far-field. This limit use to be a qualitative consideration beyond which the sources are considered as distant, and therefore the tsunami travel time from the source to the coast is enough to carry out evacuation plans.

For the Pacific coast of Central America we have chosen to classify the sources as distant and local because the way to approach their study, and the impact of the tsunamis generated, differ fundamentally. We have considered local sources those located in the Middle America Trench from the Gulf of Tehuantepec to the Nicoya peninsula. These sources have been characterized by a detailed seismotectonic and geological study, taking also the 1992 Nicaragua earthquake and tsunami as characteristic example of the type of subduction thrust fault event that can be generated in this area. Distant sources are the other sources in the Pacific basin, to model this type of sources we used historical and recent earthquakes and tsunamis.

2.1 Distant sources

We use data from the literature on seismic sources of recent and historical destructive tsunamigenic events in the Pacific basin. The source ruptures were characterized from inversions of geophysical and/or geodetical data (Barrientos and Ward, 1990; Hayes, 2009, 2010, 2011), from observations of tsunami waves (Johnson and Satake, 1999) or from both (Ichinose et al., 2007). There are two particular sources that could be considered intermediate because of its proximity to El Salvador, but whose features have

NHESSD

1, 2127–2161, 2013

Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez
et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



been defined based on historical events. These cases are the Mexico earthquake of 1787 and the Colombia earthquake of 1906. For both cases the characterization of the sources has been made from historical observations (Stewart et al., 1981; Kanamori and McNally, 1982; Suárez and Albini, 2009). In Table 1 the rupture parameters for single rectangular sources of these intermediate events are shown.

In Fig. 1a, the far-field sources are shown. We tried to incorporate the different types of large earthquakes that could take place in the Pacific basin. In the area of Japan – Kamchatka we used the events of 1952 in Kamchatka, with an estimated magnitude of 9.0, and the $M_W = 9.0$ Tohoku-Oki 2011 earthquake and tsunami. For the Kamchatka event we used the slip distribution of Johnson and Satake (1999) while for the Tohoku-Oki event we used the Hayes (2011) slip distribution. For the Alaska area event we used the 1964 $M_W = 9.2$ with the rupture model of Ichinose et al. (2007). In South America we have used the events of $M_W = 9.5$ Chile 1960 (Barrientos and Ward, 1990) and 2010 $M_W = 8.8$ (Hayes, 2010). To cover the possible events coming from Oceania, in front of the coast of Central America, we modelled the $M_W = 8.1$ Samoa-Tonga event of 2009, with the slip model of Hayes (2009). All these events have been modelled as complex ruptures from the finite fault models published (Table 2).

2.2 Local sources

When defining local sources we can not use only past events, due to the absence of a sufficient number of instrumental records. We need to study the seismotectonic characteristics of the area to characterize the local sources.

The main local tsunamigenic seismic sources in the area are related with the subduction of the Cocos plate under the Caribbean plate. We can split the potential tsunamigenic seismic sources into two groups: on one hand reverse fault events of the subduction interface and on the other normal fault outer-rise events (Satake and Tanioka, 1999).

The reverse faulting earthquakes at the subduction interface are the most common events in subduction zones, providing the mechanism responsible for large

Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez
et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

as a segment rupture the 1992 Nicaragua event of magnitude $M_W = 7.7$ and we divided the rest of the subduction interface into three parts. The boundaries between segments have been established based in geomorphological features. We defined a segment for the Chiapas region (Chiapas Thrust, CT), from the subduction of the Tehuantepec ridge to the subduction of a bathymetric feature clearly visible in the bathymetry as a continuation of the Siqueiros fracture zone (Manea et al., 2005). From this point to the submarine canyon of San Jose we define another segment (Guatemala Thrust, GT). We have taken the San José submarine canyon as a possible reflection of an irregularity in the upper plate lithosphere, also accompanied by a change in the orientation of the trench. Finally, from this limit and to the Gulf of Fonseca, which acted as a barrier for the 1992 Nicaragua event, we have defined the segment of El Salvador (El Salvador Thrust, EST).

From the subduction segmentation (Fig. 1b) we obtained the strikes of the sources and the maximum lengths for the different event ruptures. The width of the fault has been obtained from a maximum rupture depth of the subduction interface and its dip. The maximum rupture depth have been set to 20 km, a reasonable limit given that the event of Nicaragua in 1992 had a maximum depth of rupture of 14 km, while the dip chosen was 16° , the same of the Nicaragua event. These data are consistent with the recent $M_W = 7.3$ subduction event of 27 August 2012 in front of El Salvador. The rupture took place in the first 20 km of the subduction interface with a dip of 16° as shown in the finite fault model of Hayes (2012).

To obtain the maximum magnitude from the source dimensions, global empirical relationships are often used. Recently there have been studies that use data from earthquakes in subduction zones to define these relationships (Blaser et al., 2010; Strasser et al., 2010). We used the relation of Strasser et al. (2010) which relates the rupture area (A) at the interface with the magnitude of the event.

$$M_W = 4.441 + 0.846 \times \log_{10}(A) \quad (1)$$

the computational calculation times. Nesting grids is made in both directions, interpolating both time and space. The model includes flooding and drying as well, which is fundamental to compute the maximum inundation (run-up).

In a Cartesian coordinate system the NSWE can be expressed as:

5 *Mass conservation equation:*

$$\frac{\partial \zeta}{\partial t} + \frac{\partial P}{\partial x} + \frac{\partial Q}{\partial y} = 0 \quad (4)$$

Momentum conservation equations:

$$\frac{\partial P}{\partial t} + \frac{\partial P^2}{\partial x} + \frac{\partial PQ}{\partial y} + gH \frac{\partial \zeta}{\partial x} + \tau_x H - fQ = 0 \quad (5)$$

$$\frac{\partial P}{\partial t} + \frac{\partial PQ}{\partial x} + \frac{\partial Q^2}{\partial y} + gH \frac{\partial \zeta}{\partial y} + \tau_y H - fP = 0 \quad (6)$$

10 where ζ is the free surface elevation above mean sea level; x and y represent the longitude and latitude of the earth; τ_x and τ_y are the bottom shear stress in x-axis (pointing to the east) and y-axis pointing to the north; P and Q stand for the volume fluxes ($P = Hu$ and $Q = Hv$ with u and v being the depth-averaged velocities in the longitude and latitude direction); H is the total water depth ($H = h + \zeta$) with h being the water depth; f represents the Coriolis parameter; and g is the acceleration due to gravity.

Initial and boundary conditions for the simulated events can be introduced defining a fault model, in the case of a seismic source, or defining a seafloor deformation. The seafloor deformation from the local seismic tsunamigenic sources, defined as single rectangular ruptures, have been modelled with the Okada (1985) equations included in the C3 model. The seafloor deformations of the far field sources, defined as slip variable ruptures, have been computed by means of the Okada (1992) equations implemented in the program Coulomb 3.3 (Toda et al., 2011), developed on Matlab.

We used several data sources to build the bathymetric grids for the propagation and flooding numerical models: (1) Gebco_08 (GEBCO, 2008) bathymetry database,

Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



(2) digitized bathymetric charts in near-shore areas and (3) high resolution bathymetric data from hydrographic surveys. For the topography we used a digital terrain model with a cell size of 10 m provided by the Ministry of Environment and Natural Resources of El Salvador. This DTM was obtained originally from the digitalization of 1 : 25 000 maps.

5 These data have been merged and 6 regular grids have been elaborated, included in four nested levels (Table 4, Fig. 3).

4 Results

The objective of the research was twofold, on the one hand the characterization of the threat over the entire coast of El Salvador, and on the other the computation of flooding maps for the three main localities of the Salvadorian coast. For the later we developed detailed flooding models. For the former, due to the extension of the coastal area, we computed maximum elevation maps and from the elevation in the near-shore we computed an estimation of the run-up and the flooded area using the Synolakis (1987) relations adapted to El Salvador (a similar approximation was used for the state of California, Eisner et al., 2001; Barberopoulou et al., 2011).

As described above, 24 tsunami scenarios from different seismic sources at different locations that could impact the study area have been defined. Instead of presenting the set of maps produced for each scenario, we have elaborated aggregated maps, which means that they combine results of all the considered scenarios in one unique map. In this map each variable has a value on each point of the grid. That value usually is chosen to be the maximum of all the values obtained from the numerical simulations. This type of maps allows to represent graphically the worst condition on every point in one unique map.

Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez
et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

4.1 Hazard map at national scale

The following variables are represented in the tsunami hazard map for El Salvador (Fig. 4), for the whole coast: Maximum wave elevation (MWE) in the sea (m), using the equinoctial highest tidal level as reference (2.0 m); run-up (m), defined as the maximum topographic elevation reached during flooding, represented with vertical bars all along the coast; minimum tsunami travel time (min) and maximum flooding area as the maximum limit of flooding by tsunami onshore.

In this case the maximum flooding has been obtained applying the empiric formulation of (Synolakis, 1987) to obtain the run-up from the wave elevation computed with the C3 model at the near-shore with the breaking wave criteria of Gjevik and Peder-
sen (1981). These punctual values at the coast have been used to generate a run-up grid with a nearest neighbour interpolating algorithm. Subtracting the topography from this grid we obtain an estimated flooded area on those cells with positive values. This approximation has been used in a similar way previously (Eisner et al., 2001; Barberopoulou et al., 2011).

As can be seen in Fig. 4 the MWE obtained near the shore ranges from 1 m in the area of La Unión and the Gulf of Fonseca to more than 3 m in the area of the Lempa river delta and Acajutla – Barra de Santiago.

The maximum run-up values are obtained in the area of Acajutla, La Libertad and two locations near the Gulf of Fonseca: Playa el Cuco and Punta Amapala. In these locations run-up values higher than 6 m are expected, with a maximum of 7.2 m at La Libertad. In the western Salvadorian coast, run-up values higher than 5 m are common, while in the eastern area, approximately from La Libertad to the Gulf of Fonseca, the run-up values are lower.

The more exposed areas to flooding are the lowlands in the Lempa River delta and the Barra de Santiago. These are marshy areas and lagoons behind low relief coastal sandy bars. In Fig. 4 is shown the maximum flooded area estimation. When the friction

NHESSD

1, 2127–2161, 2013

Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

is taken into account, as in the local flooding models simulated, the run-up distance, and then the flooded area, is lower.

The area where the waves are expected to reach at the shorter time is Punta Remedios and Los Cobanos beach; where the minimum tsunami travel time is 25 min, for the rest of the country the minimum tsunami travel time is around 30 min, increasing towards the east with values of 45 min near the Gulf of Fonseca and more than 1 h inside the gulf.

4.2 Local flooding maps

Three types of map have been generated for each location: (1) Maximum wave elevation (MWE) map, (2) Maximum flood depth map, and (3) the person (or human) instability hazard map. In order to calculate the worst scenario, as it is a deterministic study, the equinoctial highest tidal level on each area has been considered: +2.0 m at La Libertad and Acajutla, and +3.0 m at the Gulf of Fonseca. For the local maps the flooding has been computed using the C3 model. From the maximum depth and maximum current speed on each scenario we computed the flood depth – flood current speed product. This product is used to estimate the human instability hazard and is classified in levels (Jonkman et al., 2008) according to a semaphore criteria.

4.2.1 Acajutla

The area of Acajutla – Barra de Santiago is characterized by two distinct zones. On the western and center parts the relief is very low and lagoons and marshes are common, while in the eastern edge the coast is steeper. This produces greater flooding areas in the west, while towards the east the flooding area is smaller but the flood depth and person instability hazard is greater (Fig. 5).

Maximum Water Elevations of 4 m are widely produced along the coast, and maximum values of circa 8 m are reached southward of the Acajutla port, where a petrol

Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez
et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

tank area is situated. In the marshy area towards the El Salvador – Guatemala boundary, maximum wave elevations of 5 m are reached.

The coast from Acajutla port towards the west can be affected by severe flooding with depths of 2 m and high current speeds due to its closeness to the coast. In this populated area the person instability hazard is high and the potential evacuation routes scarce.

4.2.2 La Libertad

In the area of La Libertad the MWE is greater than 3 m, and in the pier area more than 4 m are reached (Fig. 6). Towards the west, where the coast is steeper and rocky, MWE of 5 and 6 m can be generated.

Flood depths of 4 m are frequent, and the flooded area is remarkable, specially at the east of the municipality. Here, the coastal plain between the beach and the hills, a tourism place that is being developed, is completely flooded.

The person instability hazard is very high due essentially to the closeness to the coast. High depths and current speeds makes this zone very dangerous in case of tsunami.

4.2.3 Golfo de Fonseca – La Unión

The Gulf of Fonseca is a great extension of shallow water and marshy coasts with small islands inside. This is the only Pacific coast of Honduras, shared with El Salvador towards the west and with Nicaragua towards the east. Inside of the gulf the impact of the waves is almost negligible, with MWE of around 1.5 m in the worst cases (Fig. 7). In the area of La Unión, an important port for El Salvador, MWE of 1 m are reached in the worst cases.

Due to the low impact of the tsunami waves inside the Gulf of Fonseca, the person instability hazard in the area is generally low. The tsunami travel time is greater than 1 h, being 90 min for La Unión port.

**Tsunami hazard
assessment in El
Salvador**

J. A. Álvarez-Gómez
et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



5 Discussion

We used an empirical approximation for the whole country in order to obtain an estimated flooding area. The Synolakis (1987) relations with the breaking wave criteria of Gjevik and Pedersen (1981) have been used. We can compare the flooding areas obtained through the empirical formulation, with the flooding areas obtained with the numerical models in the local grids (Acajutla, La Libertad and the Gulf of Fonseca). The results of the empirical approximation are similar to the results obtained with the numerical modelling. The flooding areas obtained with the Synolakis (1987) empirical relations are a bit more conservatives (more flooding) than the flooding areas obtained with the flooding models. This is basically due to the fact that the numerical model includes turbulence dissipation (tsunami wave breaking) and bottom friction, being then more realistic. In any case the empirical results seems to be good enough to obtain a preliminary, or a countrywide, tsunami hazard estimation.

The maximum estimated run-up (countrywide) in La Libertad (7.2 m, Fig. 4) is a bit higher than that obtained with the flooding models (~ 6 m, Fig. 6). In the area of Acajutla and the western plains the estimated run-up is ~ 5 m, which is in good correlation with the obtained flooding with the numerical models (Fig. 5). In the Gulf of Fonseca the run-up values are lower than 2 m (Fig. 4) which is coherent with the results obtained in the numerical models (Fig. 7). It could be convenient to develop new numerical simulations for the Lempa river delta, which is the area with more extensive flooding of the country, in order to constrain the validity of our estimations.

In the area of Acajutla there are some aspects related to the exposure to tsunamis that should be taken into account in future urban planing and on the adoption of tsunami hazard mitigation measures. An important impact can be expected in the area southward of the Acajutla dock, here MWE greater than 6 m are possible. This area is where the Petrol tanks are mainly situated and special care should be taken. Westward of Acajutla there is an important extension of tourism resorts and vacation residences, in addition to a protected environment area. This zone is widely flooded in our models

NHESSD

1, 2127–2161, 2013

Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez
et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

and there are scarce possibilities of evacuation routes. This area was already affected by a destructive tsunami in 1902, possibly due to a local source (Lardé y Larín, 2000; Fernández, 2002; Álvarez-Gómez et al., 2012).

La Libertad is an important tourism center. Due to its closeness to San Salvador, the capital city of the country, La Libertad is a very busy location on week ends and holidays. Its configuration on a strip parallel to the coast and the closeness to the beach of some resorts and houses make this area very vulnerable. Moreover, the computed values of person instability hazard are very high, stressing the necessity of good evacuation plan and mitigation measures.

The flooding maps of this study are a key tool for the authorities in order to define exposed areas on each zone. The planning for mitigation measures and decision makings in a local level, must be done using these deterministic high resolution maps. These maps have been introduced to the Environment Ministry of El Salvador, as well as to Civil Protection Council of the Republic of El Salvador and to the local authorities at Acajutla, La Libertad and La Unión.

6 Conclusions

The tsunami hazard at El Salvador has been evaluated through the use of deterministic worst-case scenarios from 24 sources.

A countrywide hazard map for El Salvador has been developed. This map is an aggregated map from the maximum values (minimum values in the case of tsunami travel time) of the worst-case scenarios, showing maximum wave elevation, minimum tsunami travel times, estimated maximum run-up and estimated flooding areas; both estimations based on the Synolakis (1987) relations.

Aggregated maps of maximum wave elevation, minimum tsunami travel time, flooding depth and human instability hazard have been produced for the three main localities of the Salvadorian coast through high resolution tsunami flooding numerical models.

Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez
et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

These aggregated maps are useful tools for urban development and mitigation measures planning.

In the western Salvadorian coast, run-ups higher than 5 m are common, while in the eastern area, approximately from La Libertad to the Gulf of Fonseca, the run-up values are lower. The maximum run-up values are above 6 m in Acajutla, La Libertad and near the Gulf of Fonseca. The more exposed areas to flooding are the lowlands in the Lempa River delta and the Barra de Santiago western plains (Fig. 4).

The coast from Acajutla port towards the west can be affected by severe flooding with depths of 2 m and high current speeds due to its closeness to the coast (Fig. 5). In this populated area the person instability hazard is high and the potential evacuation routes scarce.

In La Libertad flood depths of 4 m are frequent, and the flooded area is remarkable, specially at the east of the municipality (Fig. 6). Here, the coastal plain between the beach and the hills, a tourism place that is being developed, could be completely flooded.

Inside of the Gulf of Fonseca the impact of the waves is almost negligible, with MWE of around 1.5 m in the worst cases (Fig. 7). In the area of La Unión, an important port for El Salvador, MWE of 1 m are reached in the worst cases.

The results of the empirical approximation (countrywide) are similar to the results obtained with the numerical modelling. The flooding areas obtained with the Synolakis (1987) empirical relations are a bit more conservatives (more flooding) than the flooding areas obtained with the flooding models. The empirical results seems to be good enough to obtain a preliminary tsunami hazard estimation.

It could be convenient to develop new numerical models for the Lempa river delta, which is the area with more extensive flooding of the country, in order to test the validity of our estimations.

In the areas of Acajutla and La Libertad there are some aspects related to the exposure to tsunamis that should be taken into account in future urban planing and on the adoption of tsunami hazard mitigation measures. Both are tourism centres being

Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



actively developed with areas that can be impacted by important tsunami flooding. In the case of Acajutla evacuation routes could be difficult to implement due to the physiographic features of the Western Plains, with barriers, lagoons and marshes.

Acknowledgements. This work is part of the project “Tsunami Risk Assessment in El Salvador”, financed by AECID (Spanish Agency for International Development Cooperation) during the period 2009–12. We would like to acknowledge the comments and suggestions of the three anonymous reviewers. The figures have been done mainly with GMT (Wessel and Smith, 1998).

References

- Álvarez-Gómez, J. A., Meijer, P. T., Martínez-Díaz, J. J., and Capote, R.: Constraints from finite element modeling on the active tectonics of northern Central America and the Middle America Trench, *Tectonics*, 27, TC1008, doi:10.1029/2007TC002162, 2008. 2133
- Álvarez-Gómez, J. A., Gutiérrez Gutiérrez, O. Q., Aniel-Quiroga, Í., and González, M.: Tsunami-genic potential of outer-rise normal faults at the Middle America trench in Central America, *Tectonophysics*, 574–575, 133–143, doi:10.1016/j.tecto.2012.08.014, 2012. 2133, 2142, 2155
- Annaka, T., Satake, K., Sakakiyama, T., Yanagisawa, K., and Shuto, N.: Logic-tree approach for probabilistic tsunami hazard analysis and its applications to the Japanese coasts, *Pure Appl. Geophys.*, 164, 577–592, doi:10.1007/s00024-006-0174-3, 2007. 2130
- Barberopoulou, A., Borrero, J. C., Uslu, B., Legg, M. R., Synolakis, C. E.: A second generation of tsunami inundation maps for the state of California, *Pure Appl. Geophys.*, 168, 2133–2146, 2011. 2137, 2138
- Barrientos, S. E. and Ward, S. N.: The 1960 Chile earthquake: inversion for slip distribution from surface deformation, *Geophys. J. Int.*, 103, 589–598, 1990. 2131, 2132, 2152
- Beck, S. L. and Ruff, L. J.: Rupture process of the great 1963 Kurile Islands earthquake sequence: asperity interaction and multiple event rupture, *J. Geophys. Res.*, 92, 14123–14138, doi:10.1029/JB092iB13p14123, 1987. 2156
- Blaser, L., Krüger, F., Ohrnberger, M., and Scherbaum, F.: Scaling relations of earthquake source parameter estimates with special focus on subduction environment, *B. Seismolog. Soc. Am.*, 100, 2914–2926, doi:10.1785/0120100111, 2010. 2134, 2156

Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez
et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez
et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

- Burbidge, D., Cummins, P. R., Mleczo, R., and Thio, H. K.: A probabilistic tsunami hazard assessment for Western Australia, *Pure Appl. Geophys.*, 165, 2059–2088, 2008. 2130
- DeMets, C., Gordon, R. G., and Argus, D. F.: Geologically current plate motions, *Geophys. J. Int.*, 181, 1–80, doi:10.1111/j.1365-246X.2009.04491.x, 2010. 2133
- 5 DIGESTYC: VI censo de población y V de vivienda, Tech. rep., Dirección General de Estadística y Censos, Ministry of Economy of El Salvador, San Salvador, El Salvador, 2007. 2129
- Eisner, R. K., Borrero, J. C., and Synolakis, C. E.: Inundation maps for the State of California, in: ITS 2001 Proceedings, NTHMP Review Session, Seattle, 67–81, 2001. 2137, 2138
- Fernández, M.: Daños, efectos y amenaza de tsunamis en América Central, *Revista Geológica de América Central*, 26, 71–83, 2002. 2129, 2133, 2142
- 10 Franco, A., Lasserre, C., Lyon-Caen, H., Kostoglodov, V., Molina, E., Guzman-Speziale, M., Monterosso, D., Robles, V., Figueroa, C., Amaya, W., Barrier, E., Chiquin, L., Moran, S., Flores, O., Romero, J., Santiago, J. A., Manea, M., and Manea, V. C.: Fault kinematics in northern Central America and coupling along the subduction interface of the Cocos Plate, from GPS data in Chiapas (Mexico), Guatemala and El Salvador, *Geophys. J. Int.*, 189, 1223–1236, doi:10.1111/j.1365-246X.2012.05390.x, 2012. 2133
- 15 Fujii, Y. and Satake, K.: Tsunami Sources of the November 2006 and January 2007 great Kuril Earthquakes, *B. Seismolog. Soc. Am.*, 98, 1559–1571, doi:10.1785/0120070221, 2008. 2133
- 20 GEBCO: The GEBCO_08 Grid, version 20081212; available at: <http://www.gebco.net> (last access: 25 October 2010), 2008. 2136
- George, D. L.: Augmented Riemann solvers for the shallow water equations over variable topography with steady states and inundation, *J. Computat. Phys.*, 227, 3089–3113, doi:10.1016/j.jcp.2007.10.027, 2008. 2135
- 25 Gjevik, B. and Pedersen, G.: Run-up of long waves on an inclined plane, vol. 2 of Preprint series, Dept of Maths, University of Oslo, 1981. 2138, 2141
- González, F. I., Geist, E. L., Jaffe, B., Kânoglu, U., Mofjeld, H., Synolakis, C. E., Titov, V. V., Arcas, D., Bellomo, D., Carlton, D., Horning, T., Johnson, J., Newman, J., Parsons, T., Peters, R., Peterson, C., Priest, G., Venturato, A., Weber, J., Wong, F., and Yalciner, A.: Probabilistic tsunami hazard assessment at Seaside, Oregon, for near- and far-field seismic sources, *J. Geophys. Res.*, 114, C11023, doi:10.1029/2008JC005132, 2009. 2130
- 30

Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez
et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

- Grezio, A., Marzocchi, W., Sandri, L., and Gasparini, P.: A Bayesian procedure for Probabilistic Tsunami Hazard Assessment, *Nat. Hazards*, 53, 159–174, doi:10.1007/s11069-009-9418-8, 2010. 2130
- Gusman, A. R., Tanioka, Y., Matsumoto, H., and Iwasaki, S.-I.: Analysis of the tsunami generated by the great 1977 Sumba earthquake that occurred in Indonesia, *B. Seismol. Soc. Am.*, 99, 2169–2179, doi:10.1785/0120080324, 2009. 2133
- Guzmán-Speziale, M. and Gómez-González, J. M.: Seismic Strain rate along the Middle America Trench reveals significant differences between Cocos-North America and Cocos-Caribbean convergence, *Geophys. J. Int.*, 166, 179–185, 2006. 2133
- Hanks, T. C. and Kanamori, H.: A moment magnitude scale, *J. Geophys. Res.*, 84, 2348–2350, doi:10.1029/JB084iB05p02348, 1979. 2135
- Hayes, G.: 2009 Mw 8.0 Samoa earthquake finite fault model, available at: http://earthquake.usgs.gov/earthquakes/eqinthenews/2009/us2009mdbi/finite_fault.php (last access: 5 December 2012), 2009. 2131, 2132, 2152
- Hayes, G.: 2010 Mw 8.8 Maule, Chile earthquake finite fault model, available at: http://earthquake.usgs.gov/earthquakes/eqinthenews/2010/us2010tfan/finite_fault.php (last access: 5 December 2012), 2010. 2131, 2132, 2152
- Hayes, G.: 2011 Mw 9.0 Offshore Honshu, Japan, earthquake finite fault model, http://earthquake.usgs.gov/earthquakes/eqinthenews/2011/usc0001xgp/finite_fault.php (last access: 5 December 2012), 2011. 2131, 2132, 2152
- Hayes, G.: 2012 Mw 7.3 Offshore El Salvador earthquake finite fault model, http://earthquake.usgs.gov/earthquakes/eqinthenews/2012/usc000c7yw/finite_fault.php (last access: 5 December 2012), 2012. 2134
- Heinrich, P., Schindeler, F., Guibourg, S., and Ihmlé, P. F.: Modeling of the February 1996 Peruvian tsunami, *Geophys. Res. Lett.*, 25, 2687–2690, doi:10.1029/98GL01780, 1998. 2156
- Ichinose, G., Somerville, P., Thio, H. K., Graves, R., and O’Connell, D.: Rupture process of the 1964 Prince William Sound, Alaska, earthquake from the combined inversion of seismic, tsunami, and geodetic data, *J. Geophys. Res.*, 112, B07306, doi:10.1029/2006JB004728, 2007. 2131, 2132, 2152
- Ide, S., Imamura, F., Yoshida, Y., and Abe, K.: Source characteristics of the Nicaraguan tsunami earthquake of 2 September 1992, *Geophys. Res. Lett.*, 20, 863–866, 1993. 2133, 2156

Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez
et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

- Imamura, F., Shuto, N., Ide, S., Yoshida, Y., and Abe, K.: Estimate of the tsunami source of the 1992 Nicaraguan earthquake from tsunami data, *Geophys. Res. Lett.*, 20, 1515–1518, 1993. 2133, 2156
- Johnson, J. M. and Satake, K.: Estimation of seismic moment and slip distribution of the 1 April 1946, Aleutian tsunami earthquake, *J. Geophys. Res.*, 102, 11765–11774, doi:10.1029/97JB00274, 1997. 2156
- Johnson, J. and Satake, K.: Asperity distribution of the 1952 Great Kamchatka Earthquake and its relation to future earthquake potential in Kamchatka, in: *Seismogenic and Tsunami-genic Processes in Shallow Subduction Zones*, edited by Sauber, J., and Dmowska, R., Pageoph Topical Volumes, Birkhäuser Basel, doi:10.1007/978-3-0348-8679-6_8, 541–553, 1999. 2131, 2132, 2152
- Jonkman, S., Vrijling, J., and Vrouwenvelder, A.: Methods for the estimation of loss of life due to floods: a literature review and a proposal for a new method, *Nat. Hazards*, 46, 353–389, doi:10.1007/s11069-008-9227-5, 2008. 2130, 2139
- Kanamori, H. and Anderson, D. L.: Theoretical basis of some empirical relations in seismology, *B. Seismol. Soc. Am.*, 65, 1073–1095, 1975. 2135
- Kanamori, H. and McNally, K. C.: Variable rupture mode of the subduction zone along the Ecuador-Colombia coast, *B. Seismol. Soc. Am.*, 72, 1241–1253, 1982. 2132
- Lardé y Larín, J.: *El Salvador: Inundaciones e incendios, Erupciones y terremotos*, 2nd edn., Editorial DPI, San Salvador, El Salvador, 2000. 2142
- Liu, P. L. F., Cho, S., Yoon, S. B., and Seo, S. N.: Numerical simulations of the 1960 Chilean tsunami propagation and inundation at Hilo, Hawaii, *Recent Development in Tsunami Research*, in: *Tsunami: Progress in Prediction, Disaster Prevention and Warning*, edited by: Tsuchiya, Y. and Shutō, N., *Advances in Natural and Technological Hazards Research*, Springer, 99–115, 1994. 2135
- Liu, P. L.-F., Cho, Y.-S., Briggs, M. J., Kanoglu, U., and Synolakis, C. E.: Runup of solitary waves on a circular island, *J. Fluid Mech.*, 302, 259–285, 1995. 2135
- López, A. M. and Okal, E. A.: A seismological reassessment of the source of the 1946 Aleutian “tsunami” earthquake, *Geophys. J. Int.*, 165, 835–849, 2006. 2133
- Lyon-Caen, H., Barrier, E., Lasserre, C., Franco, A., Arzu, I., Chiquin, L., Chiquin, M., Duquesnoy, T., Flores, O., Galicia, O., Luna, J., Molina, E., Porrás, O., Requena, J., Robles, V., Romero, J., and Wolf, R.: Kinematics of the North American-Caribbean-Cocos plates in

Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez
et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

- Central America from new GPS measurements across the Polochic-Motagua fault system, *Geophys. Res. Lett.*, 33, L19309, doi:10.1029/2006GL027694, 2006. 2133
- Manea, M., Manea, V. C., Ferrari, L., Kostoglodov, V., and Bandy, W. L.: Tectonic evolution of the Tehuantepec Ridge, *Earth Planet. Sc. Lett.*, 238, 64–77, 2005. 2134
- 5 Okada, Y.: Surface deformation due to shear and tensile faults in a half-space, *B. Seismol. Soc. Am.*, 75, 1135–1154, 1985. 2136
- Okada, Y.: Internal deformation due to shear and tensile faults in a half-space, *B. Seismol. Soc. Am.*, 82, 1018–1040, 1992. 2136
- Okal, E. A. and Borrero, J. C.: The “tsunami earthquake” of 22 June 1932 in Manzanillo, Mexico: seismological study and tsunami simulations, *Geophys. J. Int.*, 187, 1443–1459, 2011. 2133
- 10 Okal, E. A. and Newman, A. V.: Tsunami earthquakes: the quest for a regional signal, *Phys. Earth Planet. Int.*, 124, 45–70, 2001 2133
- Olabarrieta, M., Medina, R., Gonzalez, M., and Otero, L.: C3: A finite volume-finite difference hybrid model for tsunami propagation and runup, *Comput. Geosci.*, 37, 1003–1014, 2011. 2135
- 15 Pacheco, J. F., Sykes, L. R., and Scholz, C. H.: Nature of seismic coupling along simple plate boundaries of the subduction type, *J. Geophys. Res.*, 98, 14133–14159, 1993. 2133
- Pelayo, A. M. and Wiens, D. A.: Tsunami earthquakes: slow thrust-faulting events in the accretionary wedge, *J. Geophys. Res.*, 97, 15321–15337, doi:10.1029/92JB01305, 1992. 2133, 2156
- 20 Piatanesi, A., Tinti, S., and Gavagni, I.: The slip distribution of the 1992 Nicaraguan earthquake from tsunami run-up data, *Geophys. Res. Lett.*, 23, 37–40, 1996. 2133, 2155, 2156
- Power, W., Wang, X., Lane, E., and Gillibrand, P.: A probabilistic tsunami hazard study of the auckland region, Part I: Propagation modelling and tsunami hazard assessment at the shoreline, *Pure Appl. Geophys.*, 1–14, doi:10.1007/s00024-012-0543-z, 2012. 2130
- 25 Satake, K.: Mechanism of the 1992 Nicaragua tsunami earthquake, *Geophys. Res. Lett.*, 21, 2519–2522, 1994. 2133, 2156
- Satake, K. and Tanioka, Y.: Sources of tsunami and tsunamigenic earthquakes in subduction zones, *Pure Appl. Geophys.*, 154, 467–483, doi:10.1007/s000240050240, 1999. 2132
- 30 Satake, K., Yoshida, Y., and Abe, K.: Tsunami from the Mariana earthquake of 5 April 1990: Its abnormal propagation and implications for tsunami potential from outer-rise earthquakes, *Geophys. Res. Lett.*, 19, 301–304, 1992. 2133

Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez
et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

- Satake, K., Bourgeois, J., Abe, K., Abe, K., Tsuji, Y., Imamura, F., Lio, Y., Katao, H., Noguera, E., and Estrada, F.: Tsunami field survey of the 1992 Nicaragua earthquake, *Eos Transactions American Geophysical Union*, 74, 145–157, doi:10.1029/93EO00271, 1993. 2133
- Sørensen, M. B., Spada, M., Babeyko, A., Wiemer, S., and Grunthal, G.: Probabilistic tsunami hazard in the Mediterranean Sea, *J. Geophys. Res.*, 117, B01305, doi:10.1029/2010JB008169, 2012. 2130
- Stewart, G. S., Chael, E. P., and McNally, K. C.: The 29 November 1978, Oaxaca, Mexico, earthquake: a large simple event, *J. Geophys. Res.*, 86, 5053–5060, doi:10.1029/JB086iB06p05053, 1981. 2132
- Strasser, F. O., Arango, M. C., and Bommer, J. J.: Scaling of the source dimensions of interface and intraslab subduction-zone earthquakes with moment magnitude, *Seismolog. Res. Lett.*, 81, 941–950, doi:10.1785/gssrl.81.6.941, 2010. 2134, 2156
- Suárez, G. and Albin, P.: Evidence for great tsunamigenic earthquakes (M 8.6) along the Mexican subduction zone, *B. Seismolog. Soc. Am.*, 99, 892–896, doi:10.1785/0120080201, 2009. 2132
- Synolakis, C. E.: The runup of solitary waves, *J. Fluid Mech.*, 185, 523–545, 1987. 2137, 2138, 2141, 2142, 2158
- Tanioka, Y. and Satake, K.: Fault parameters of the 1896 Sanriku tsunami earthquake estimated from tsunami numerical modeling, *Geophys. Res. Lett.*, 23, 1549–1552, doi:10.1029/96GL01479, 1996. 2156
- Tinti, S. and Armigliato, A.: The use of scenarios to evaluate the tsunami impact in southern Italy, *Mar. Geol.*, 199, 221–243, 2003. 2130
- Toda, S., Stein, R., Sevilgen, V., and Lin, J.: Coulomb 3.3 graphic-rich deformation and stress-change software – user guide, Tech. Rep. 1060, US Geological Survey, 2011. 2136
- Velasco, A. A., Ammon, C. J., Lay, T., and Zhang, J.: Imaging a slow bilateral rupture with broadband seismic waves; the 2 September 1992 Nicaraguan tsunami earthquake, *Geophys. Res. Lett.*, 21, 2629–2632, 1994. 2133
- Wang, X. and Liu, P. L.-F.: A Numerical investigation of Boumerdes-Zemmouri (Algeria) Earthquake and Tsunami, *Comp. Model. Eng. Sci.*, 10, 171–184, 2005. 2135
- Wang, X. and Liu, P. L.-F.: An analysis of 2004 Sumatra earthquake fault plane mechanisms and Indian Ocean tsunami, *J. Hydraul. Res.*, 44, 147–154, 2006. 2135

Wessel, P. and Smith, W. H. F.: New improved version of Generic Mapping Tools released, EOS Transactions of the American Geophysical Union, 79, 579, doi:10.1029/98EO00426, 1998. 2144

NHESSD

1, 2127–2161, 2013

Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez
et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez
et al.

Table 1. Rectangular source model for the events of Mexico 1787 and Colombia 1906. See text for details on the parameters.

Source	Longitude	Latitude	Depth km	Length km	Width km	Strike °	Dip °	Rake °	Slip (m) m	G Pa	M_0 Nm	M_W
Mexico 1787	-97.155	16.155	20	450	116	285	15	90	8	4.00E+010	1.67E+022	8.7
Colombia 1906	-79.025	1.980	20	500	126	32	16	90	9	4.00E+010	2.27E+022	8.8

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)


Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez
et al.

Table 2. Finite fault rupture models used for the distant recent events.

Source	Magnitude (M_W)	Finite fault rupture model
Kamchatka 1952	9.0	Johnson and Satake (1999)
Tohoku-Oki 2011	9.0	Hayes (2011)
Alaska 1964	9.2	Ichinose et al. (2007)
Chile 1960	9.5	Barrientos and Ward (1990)
Chile 2010	8.8	Hayes (2010)
Samoa-Tonga 2009	8.1	Hayes (2009)

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez
et al.

Table 3. Rectangular source model for local thrust interface earthquakes. See text for details on the parameters.

Source	Longitude	Latitude	Depth km	Length km	Width km	Strike	Dip	Rake	Slip (m) m	G Pa	M_0 Nm	M_w
El Salvador thrust (EST)	-89.5331	12.5094	10	260	73	292	16	90	4.0	2.00E+10	1.52E+21	8.1
Guatemala thrust (GT)	-91.4881	13.3170	10	205	73	295	16	90	2.6	2.00E+10	7.83E+20	7.9
Chiapas thrust (CT)	-93.6317	14.4406	10	330	73	301	16	90	5.3	2.00E+10	2.58E+21	8.2

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)

Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez
et al.

Table 4. Details of the topo-bathymetric grids used in the propagation and flooding numerical models.

Grid	Area	Cell size	Grid size
Level 1	Pacific Ocean	4' \simeq 7400 m	2851 \times 1921
Level 2	Central America	30'' \simeq 930 m	1568 \times 1088
Level 3	El Salvador Acajutla	6'' \simeq 185 m	1940 \times 545 1146 \times 798
Level 4	La Libertad Gulf of Fonseca	1'' \simeq 30 m	456 \times 216 2016 \times 1512

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[◀](#)
[▶](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)

Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez et al.

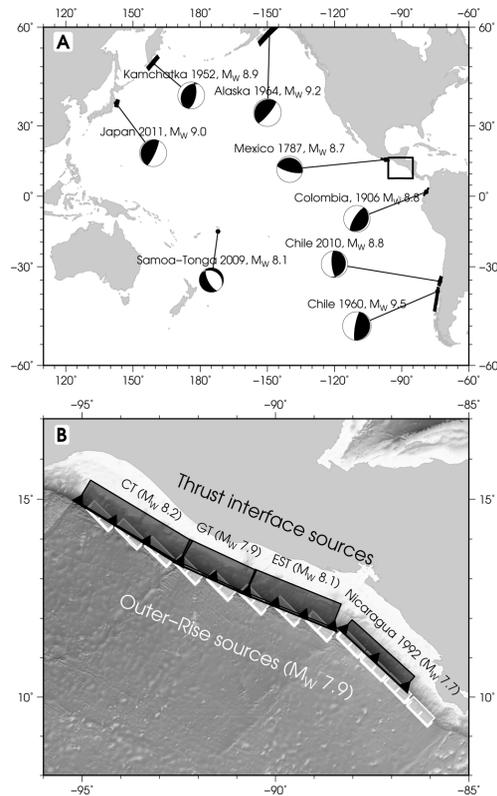


Fig. 1. Seismic sources modelled in this work. **(A)** Far field and intermediate sources. Rupture areas and focal mechanisms of the seismic events are shown. The empty rectangle show the area of Fig. 1b. **(B)** Local sources shown as simple rectangular ruptures. The outer-rise ruptures are from Álvarez-Gómez et al. (2012), the Nicaragua 1992 rupture area is taken from Piatanesi et al. (1996), see text for further details on the rest of subduction interface ruptures. CT, Chiapas Thrust; GT, Guatemala Thrust; EST, El Salvador Thrust.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[◀](#)
[▶](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)

Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez
et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

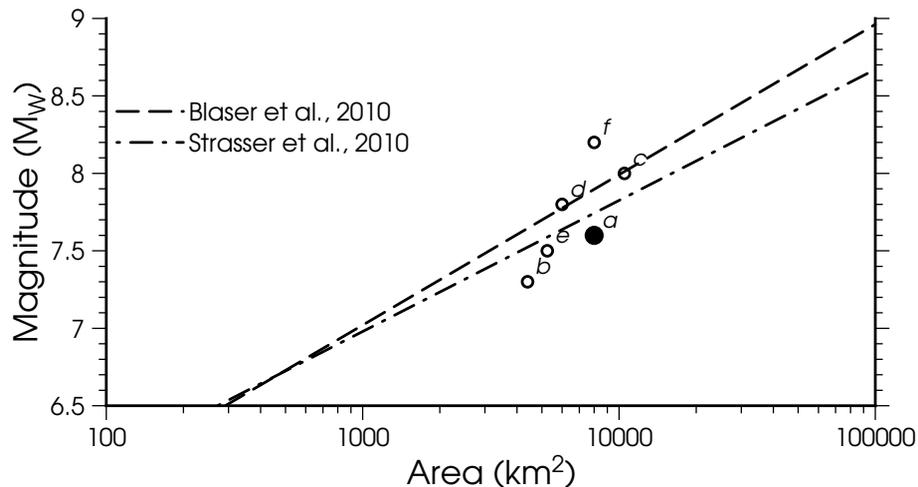


Fig. 2. Plot showing the M_W – Area empirical relations of Blaser et al. (2010) and Strasser et al. (2010) (dashed lines). The same relation is shown for historical tsunami earthquakes worldwide (empty circles) and the 1992 Nicaragua earthquake (filled circle). **(a)**, 2 September 1992 Nicaragua (Ide et al., 1993; Imamura et al., 1993; Satake, 1994; Piatanesi et al., 1996); **(b)**, 21 February 1996 Peru (Heinrich et al., 1998); **(c)**, 15 June 1896 Sanriku (Tanioka and Satake, 1996); **(d)**, 20 October 1963 Kuril (Beck and Ruff, 1987); **(e)**, 10 June 1975 Kuril (Pelayo and Wiens, 1992); **(f)**, 1 April 1946 Aleutian Islands (Johnson and Satake, 1997).

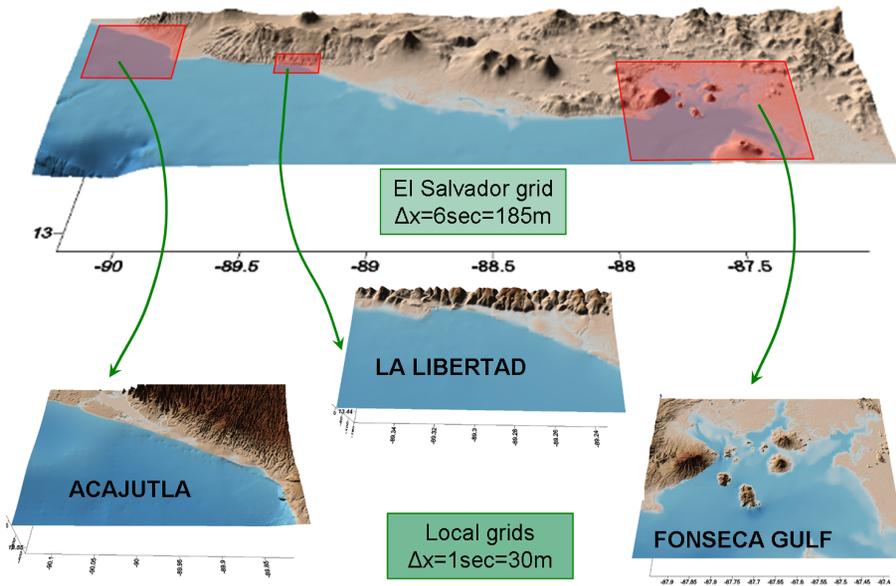


Fig. 3. Detailed bathymetric grid levels.

Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez
et al.

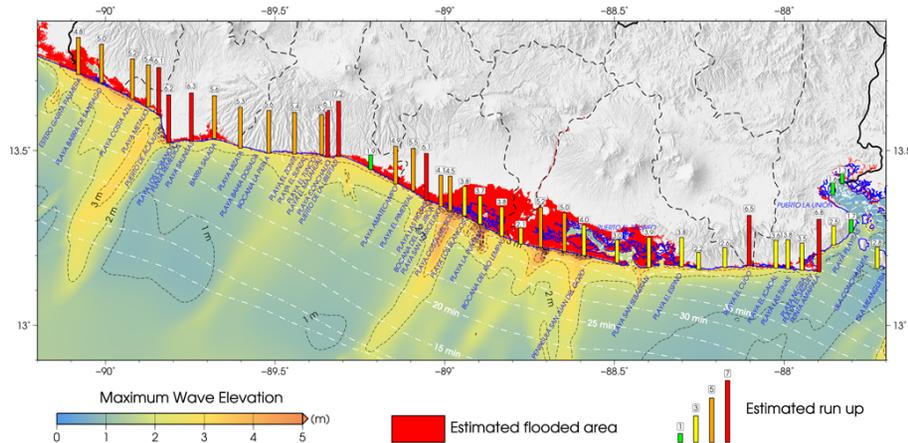


Fig. 4. El Salvador tsunami hazard map. Deterministic aggregated map of Maximum Wave Elevation (MWE) from all the seismic sources modelled. White dashed lines are minimum tsunami travel times. The coloured bars show the estimated run up computed with the (Synolakis, 1987) relation from the MWE. Red filled area shows the estimated flooding area from the computed run-up elevations.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[◀](#)
[▶](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)

Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez et al.

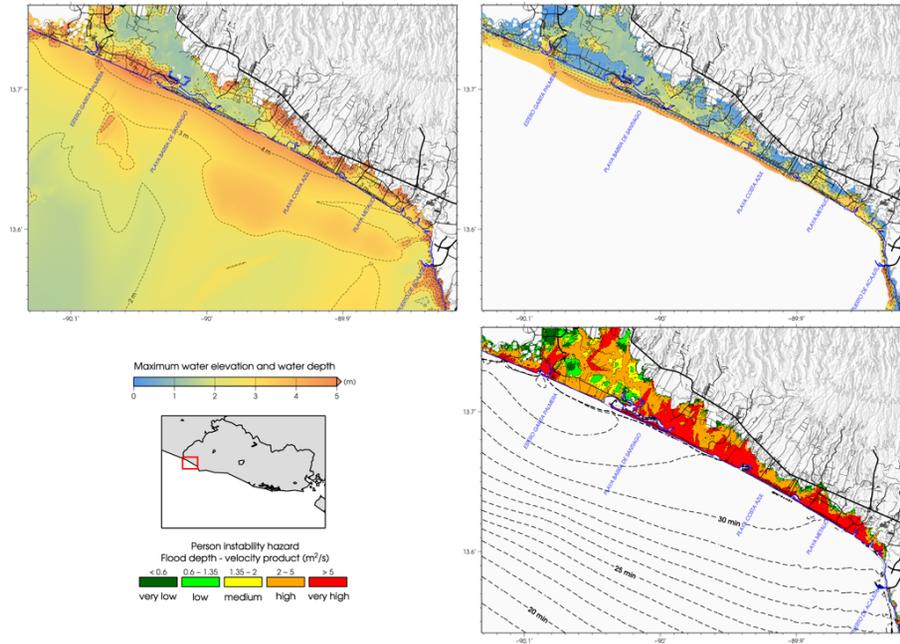


Fig. 5. Flooding map for Acajutla. Deterministic aggregated map from all the seismic sources modelled of (A) Maximum Wave Elevation (MWE), (B) Maximum Flood Depth, (C) Person Instability Hazard map, dashed lines show minimum tsunami travel time.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez
et al.

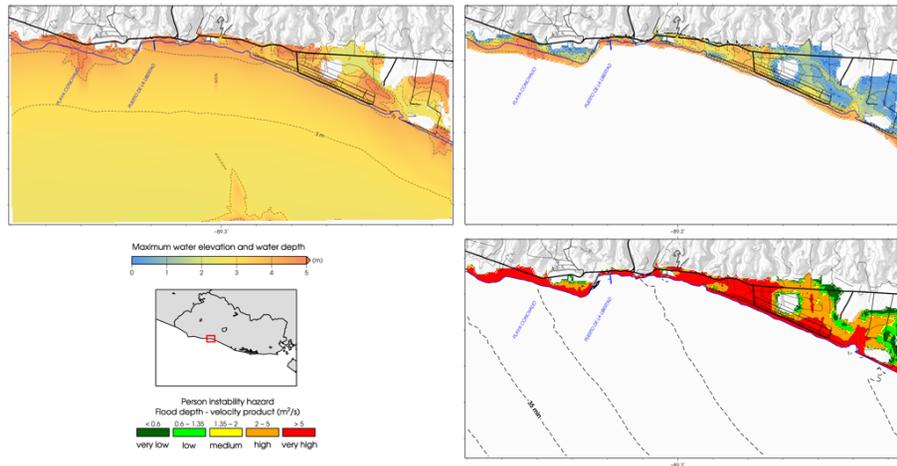


Fig. 6. Flooding map for La Libertad. Deterministic aggregated map from all the seismic sources modelled of **(A)** Maximum Wave Elevation (MWE), **(B)** Maximum Flood Depth, **(C)** Person Instability Hazard map, dashed lines show minimum tsunami travel time.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[◀](#)
[▶](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)

Tsunami hazard assessment in El Salvador

J. A. Álvarez-Gómez
et al.

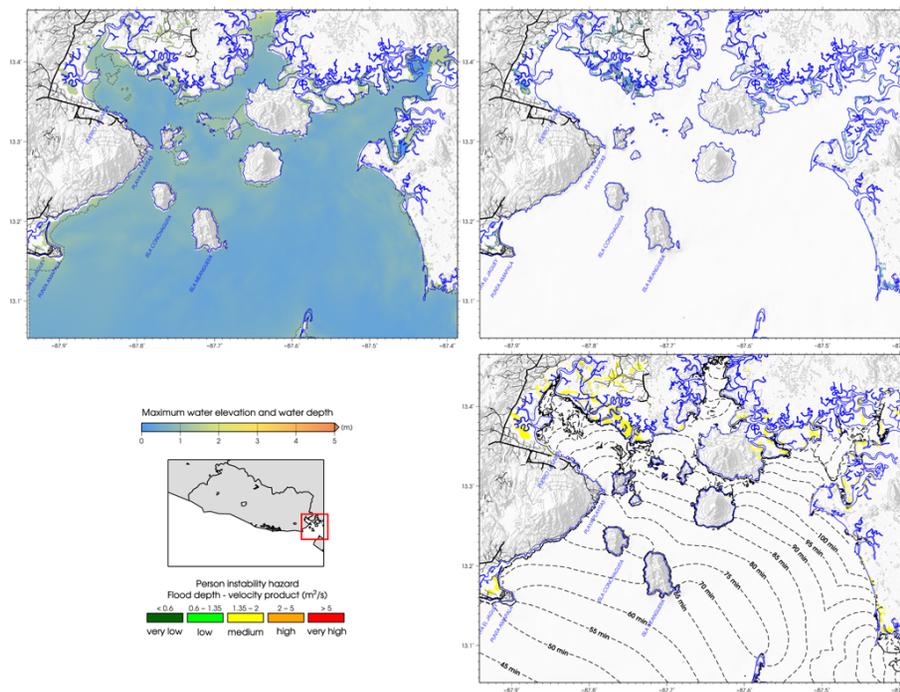


Fig. 7. Flooding map for Golfo de Fonseca – La Unión. Deterministic aggregated map from all the seismic sources modelled of **(A)** Maximum Wave Elevation (MWE), **(B)** Maximum Flood Depth, **(C)** Person Instability Hazard map, dashed lines show minimum tsunami travel time.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[◀](#)
[▶](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)