

This discussion paper is/has been under review for the journal Natural Hazards and Earth System Sciences (NHES). Please refer to the corresponding final paper in NHES if available.

Geological and geophysical characterization of the south-eastern side of the High Agri Valley (southern Apennines, Italy)

A. Giocoli^{1,2}, T. A. Stabile¹, I. Adurno^{1,†}, A. Perrone¹, M. R. Gallipoli¹, E. Gueguen¹, E. Norelli³, and S. Piscitelli¹

¹CNR-IMAA, Tito, Potenza, Italy

²ENEA, Rome, Italy

³Eni Spa, San Donato Milanese, Milan, Italy

[†]deceased

Received: 9 July 2014 – Accepted: 4 September 2014 – Published: 1 October 2014

Correspondence to: A. Giocoli (alessandro.giocoli@enea.it)

Published by Copernicus Publications on behalf of the European Geosciences Union.

6271

Abstract

In the frame of a national project funded by Eni S.p.A. and developed by three institutes of the National Research Council (the Institute of Methodologies for Environmental Analysis, the Institute of Research for Hydrogeological Protection and the Institute for
5 Electromagnetic Sensing of the Environment), a multidisciplinary approach based on the integration of satellite, aero-photogrammetric and in situ geophysical techniques was applied to investigate an area located in the Montemurro territory in the south-eastern sector of the High Agri Valley (Basilicata Region, southern Italy).

This paper reports the results of the in situ geophysical investigation. Electrical Resistivity Tomography (ERT) and Horizontal to Vertical Spectral Ratio (HVSr) by earthquakes and ambient noise measurements were carried out in the study area. The results were supported by interpretation of aerial photos, geological field surveys, morphotectonic investigation and borehole data. The joint analysis of geological, ERT and HVSr data allowed us to (1) show the shallow geological and structural setting, (2) detect the geometry of the different lithological units and their mechanical and dynamical
15 properties, (3) image a previously unmapped fault beneath suspected scarps/warps and (4) characterize the geometry of an active landslide that caused damages to structures and infrastructures.

1 Introduction

20 In areas characterized by a complex geological and tectonic setting, the occurrence of ground deformation phenomena (landslide, subsidence) can be facilitated. Indeed, tectonic lineaments may represent preferential plans on which landslides can be triggered (Guzzetti et al., 1996; Martino et al., 2004). So, the definition of the litho-structural setting is one of the basic aspects in landslide hazard assessment.

25 The study of these areas can require a multidisciplinary approach based on the integration of different techniques providing a significant number of information that can

6272

help to overcome the intrinsic limitations and drawbacks of each technique. The best choice could be represented by the application of satellite, airborne and ground-based techniques (Perrone et al., 2006; de Bari et al., 2011). The first two techniques allow obtaining a synoptic view of the investigated area providing information from a small to a medium spatial scale. They can provide indication on superficial characteristics of the investigated area like the presence of geological structures and geomorphological features, land use, vegetation cover, etc. (Simoniello et al., 2008; Roering et al., 2009; Strozzi et al., 2010). Ground-based techniques give direct and indirect information on the subsoil characteristics in a specific point of the area (Petley et al., 2005; Marcato et al., 2012).

In situ non-invasive and low-cost geophysical techniques are widely employed in the subsoil investigations (Improta et al., 2010; Siniscalchi et al., 2010; Tropeano et al., 2013; Perrone et al., 2014). In particular, the Electrical Resistivity Tomography (ERT) and the Horizontal to Vertical Spectral Ratio (HVSr) techniques have been widely applied in microzonation (Boncio et al., 2011; Moscatelli et al., 2012), seismotectonic and geomorphological studies (Giocoli et al., 2008), to characterize the seismogenic fault systems (Galli et al., 2014; Giocoli et al., 2011), to reconstruct the geometry and the mechanical properties of the superficial litho-stratigraphic units (Mucciarelli et al., 2011; Albarello et al., 2011; Gallipoli et al., 2013), to delineate landslide body (Gallipoli et al., 2000; Perrone et al., 2004; Mainsant et al., 2012), to study coseismic liquefaction phenomena (Giocoli et al., 2014).

In the frame of the project “Sviluppo ed integrazione di tecniche innovative di Osservazione della Terra per il monitoraggio di fenomeni di dissesto idrogeologico in un’area test del bacino della Val d’Agri” funded by Eni S.p.A. a multidisciplinary approach based on the joint application of satellite and ground-based Differential Interferometric Synthetic Aperture Radar (DInSAR) technique, aero-photogrammetric analysis and in situ geophysical measurements was employed to study an area located in the Montemurro territory in the south-eastern sector of the High Agri Valley (Basilicata Region, southern Italy). This area represents a high seismogenic and hydrogeological hazard area, as

6273

testified by the $M = 7$, 1857 Basilicata Earthquake that produced a big landslide with 5000 casualties (Almagià, 1910).

This paper reports the results of the in situ geophysical surveys. ERT and HVSr by earthquakes and ambient noise measurements were carried out in order to gather information on the geological and structural setting of the Montemurro area. In particular, in situ geophysical surveys were performed to study rectilinear NW–SE scarps and an active landslide affecting the study area. All geophysical data were compared and constrained with geological, geomorphological and borehole data.

2 Geological setting

The High Agri Valley (HAV) is a Quaternary NW–SE trending intermontane basin located in the axial zone of the Southern Apennines thrust belt chain (southern Italy) (Fig. 1). Brittle tectonics has strongly controlled the formation and evolution of the HAV up to the present. The deformation is testified by seismic activity and by loose slope deposits and paleosoils involved in faulting in the last 40 ka (Giano et al., 2000; D’Addezio et al., 2006). The HAV was hit by the $M 7.0$, 1857 Basilicata Earthquake. Seismogenic structure capable of producing large events is alternatively associated with: (1) Monti della Maddalena Fault System (MMFS) (Pantosti and Valensise, 1988; Maschio et al., 2005; Improta et al., 2010) and (2) Eastern Agri Fault System (EAFS) (Benedetti et al., 1998; Cello et al., 2003; Giano et al., 2000). The MMFS bounds the HAV to the SW and runs for about 25 km between Pergola and Moliterno villages, whereas the EAFS, which is associated with mature fault-line scarps, bounds the HAV to the NE. No detailed definition exists on the length of the EAFS, which based on mapped faults between Pergola and Viggiano villages is about 25 km (Cello et al., 2003; Maschio et al., 2005).

The study area falls in the southeastern part of the HAV, in the territory of Montemurro (Fig. 2). The pre-Quaternary substratum of this area consists of Tertiary siliciclastic sediments of the Gorgoglione Flysch (GF) that crop out mainly in the northern

6274

sector of Montemurro. Toward the downslope, the Gorgoglione Flysch is covered by Quaternary continental deposits (QD) related to both Vallone dell'Aspro and Torrente Casale Alloformations (Zembo et al., 2010).

5 The morphology of the Montemurro territory is the result of different concomitant factors, such as the Quaternary regional uplift and the consequent fluvial erosion. Land modelling is also controlled by lithology and the structural setting. General features of the area are the occurrence of steep slopes, stream encased within narrow and deep land incisions and, abrupt acclivity change, which could correspond to tectonic structures or lithological variations.

10 The Montemurro territory is affected by extensive hydrogeological instability phenomena. Active and quiescent landslides involve both the QD and the GF. In particular, our analysis show an active landslide, which caused damages to residences, anthropic buildings and, especially, to the main road (SP11) leading to the urban area of Montemurro. The identified active landslide was termed Verdesca landslide. It is approximately 750 m long, 320 m wide and extends between 675 and 590 m a.s.l. and has a mean inclination of about 7° (Fig. 2).

15 Our surficial investigations (e.g. field geological survey, aerial photo interpretation, etc.) show also rectilinear NW–SE trending and SW-facing scarps. These scarp are perpendicular to the strike of the streams and they are aligned to the main trend of the EAFS, which was clearly identified between the villages of Pergola to the north and Viggiano to the south (Cello et al., 2003; Maschio et al., 2005). Thus, we suspect that the scarps observed at surface represent the surface expression of an additional strand of the EAFS.

3 Geophysical surveys

25 Geophysical methods provide an efficient tool for imaging the subsoil. The suitability of a particular geophysical technique or a combination of them mainly depends on the physical property contrast involved between the target structure and surroundings,

6275

depth extent of the target, and the nature and thickness of the overburden. Generally speaking, the investigations of as many properties as possible by various geophysical methods enable a double check of results and enhance the reliability of interpretation. In this paper, we focus our attention on two complementary techniques, the Electrical Resistivity Tomography (ERT) and the Horizontal-to-Vertical Spectral Ratio (HVSr) by earthquakes and ambient noise measurements. These two techniques are among the most non-invasive, fastest and cheapest geophysical methods. All the surveys were carried out in an area located in the Montemurro territory between April 2010 and May 2012 (Fig. 2) and were aimed at: (1) imaging the structural and sedimentary setting, interpreting the nature of the geomorphological features observed at the surface, (2) verifying the nature of the NW–SE scarps observed at surface in order to interpret them either as a tectonic landform (i.e., fault scarp) or as a geomorphic feature (i.e., erosional scarp) and (3) characterizing the Verdesca landslide (e.g., geometry, thickness, etc.).

15 The ERT and HVSr results were supported by interpretation of aerial photos, morphotectonic investigation, geological field survey and were compared with the stratigraphical data obtained by three geognostic wells that are S1 (20 m deep), S2 (48 m deep) and S3 (66 m deep) (Fig. 2).

3.1 Electrical resistivity tomography

20 Three NE–SW Electrical Resistivity Tomographies (ERT) were carried out across the NW–SE scarps observed at the surface in the Montemurro territory (1–3 in Fig. 2). Only the ERT2 profile runs across the Verdesca landslide.

To acquire resistivity data, a resistivimeter Syscal R2 (Iris Instruments) connected to a multielectrode system with 48 electrodes, arranged according to the Wenner–Schlumberger array and spaced 20 m, was used. The ERT1 and ERT3 were performed along 940 m long profiles and have reached an investigation depth of about 150 m. ERT2 was realized along a 1100 m long profile using roll-along technique and reaching the same investigation depth.

6276

combine EW and NS components in the single horizontal (H) spectrum. Average single component spectra were obtained from the same procedure. For each HVSR curve the relative $\pm 2\sigma$ confidence interval is given. Some authors suggest that transient can affect estimates of fundamental frequency of soils, but a simple variation of amplitude never caused this problem according to Parolai and Galiana-Merino (2006), and Mucciarelli (2007). The ambient noise recordings and HVSR analysis have been estimated according SESAME (Chatelain et al., 2008) and Albarello et al. (2011) guidelines.

In order to validate the ambient noise HVSRs, we compared ambient noise HVSR related to the sites 33, 34 and 35 with those obtained from earthquake recordings at the sites A, B and C (Fig. 2). In particular, the ambient noise measurement related to the site 35 was performed close to the station A, the one to the site 34 near the station B, and the ambient noise recording of 33 was performed in correspondence of the station C. Figure 5a and b shows flat HVSRs for both components of the accelerometric station A, which was installed on the bedrock; on the other hand, HVSR of the station B has an evident resonance peak between 2 and 3 Hz (Fig. 5c and d). Finally, HVSR of the station C shows two clear resonance peaks at 1.5 Hz and 1.8 Hz, respectively (Fig. 5e and f). In all the three cases considered, the ambient noise HVSRs (blue lines in Fig. 5) are in agreement with the earthquake HVSRs (pink lines in Fig. 5). The availability of accelerometric recordings on a bedrock site (station A) allowed us to perform also Standard Spectral Ratio (SSR) analyses between waveforms recorded on the landslide body and those recorded at the same time on the reference site. The SSR analysis confirms the resonance peak at about 1.8 Hz in the landslide body.

In order to attribute stratigraphic and mechanic meanings to resonance peak at 1.8 Hz revealed in earthquake/ambient noise HVSRs of the station C and site 33 (landslide body), numerical analysis was performed using the model proposed by Castellaro and Mulargia (2009), the near 30 m-depth down-hole test (Fig. 6a) and the mechanical and seismic data available from other investigation carried out in the area. The stratigraphic sequence is characterized by the Quaternary continental deposits (QD) (see also S3 in Fig. 2) with *S* wave velocity (*V_s*) increasing with depth from 380 m s^{-1} in the

6279

first 15 m to 600 m s^{-1} at depth $> 15 \text{ m}$. At the bottom, the *V_s* of the Gorgoglione Flysch (GF) is more than 800 m s^{-1} (seismic bedrock) (Fig. 6a).

The inversion provided a synthetic HVSR in good agreement with the experimental one (Fig. 6b). The resonant peak at about 1.8 Hz is related to the depth of the seismic impedance contrast between the GF and the overlying 80 m thick, QD (resonant layer).

Subsequently, we have extended the seismic ambient noise measurements along all the ERT profiles in order to improve the interpretation of the results by using the joint analysis. Figure 6 shows ambient noise average HVSRs superimposed along ERT2. The HVSRs 12 and 13 show a clear resonance peak at 2.2 Hz. This peak shifts to lower frequency (1.5 Hz) for the site 14 to the site 15 (central part of the profile); the northern HVSR (sites 21 and 22) show flat curves because they lay on the outcropping seismic bedrock (Gorgoglione Flysch). Thus, the results summarized in Fig. 6 point out that the fundamental frequency is related to the depth variation of the seismic impedance contrast between the high-resistive GF and the overlying low-resistive QD.

Finally, it is possible to observe in Fig. 6 a little lowering of the average HVSR in correspondence of 1.7 Hz at sites 18–21. The disturbance is attributable to the presence of in-service wind turbine towers (Saccorotti et al., 2011) near those sites, and it is principally evident on the HVSR obtained for the EW component. Since such frequency is near the resonance peak, in these four sites we reconstructed the HVSR function by considering only the NE component.

4 Discussions and conclusions

In the frame of the project “Sviluppo ed integrazione di tecniche innovative di Osservazione della Terra per il monitoraggio di fenomeni di dissesto idrogeologico in un’area test del bacino della Val d’Agri” funded by Eni S.p.A. a multidisciplinary approach based on the integration of satellite, aero-photogrammetric and in situ geophysical techniques was applied to investigate an area located in the Montemurro territory in the south-eastern sector of the HAV. In this paper we focused our attention on the results obtained

6280

by the joint application of two in situ geophysical techniques, the ERT and the earthquake and ambient noise HVSR. The interpretation of results was supported by morphotectonic investigation, interpretation of aerial photos, geological field survey and borehole data. In particular, the joint application of these two in situ geophysical techniques allowed us to infer a good correspondence between the resistivity contrast and the seismic impedance interface. Both interfaces coincide with the boundary between the GF and the overlying QD characterized by different resistivity and mechanical behavior.

On the whole, the joint analysis of geological, ERT and HVSR allowed us to better: (1) image the shallow geological and structural setting, (2) detect the geometry of the different lithological units and their mechanical and dynamical properties; and (3) verify the nature of the NW–SE scarps observed at surface and to interpret them as the surface expression of the previously unmapped Montemurro Fault (Fig. 7).

HVSR technique does not show resonance peaks related to the depth of the sliding surface of the Verdesca landslide due to a negligible impedance contrast between the QD and the material of the Verdesca landslide. Thus, only ERT and exploratory boreholes were integrated to: (1) characterize the geometry of the Verdesca landslide, (2) locate the sliding surface; and (3) estimate the thickness of the landslide body.

We think that the results presented in this study provide new basic data for the hydrogeological and seismic hazard assessment of the HAV. In particular, the HAV is one of the areas of Italy with the highest seismogenic potential. In addition, the seismic risk is amplified by the presence of two important human activities, such as the exploitation of the largest productive on-shore oil field in West Europe, managed by the Eni company, and the artificial Pertusillo water reservoir (Stabile et al., 2014a, b). The recognition of the Montemurro Fault, which increases longitudinal extent of the EAFS previously mapped by Cello et al. (2003) and Maschio et al. (2005), may indeed have significant implications for the local seismic hazard. However, our data do not show if the EAFS is the seismogenic structure of the High Agri Valley, which remains undefined.

Acknowledgements. This research activity was funded by Eni S.p.A.

6281

References

- Albarelo, D., Cesi, C., Eulilli, V., Guerrini, F., Lunedei, E., Paolucci, E., Pileggi, D., and Puzilli, L. M.: The contribution of the ambient vibration prospecting in seismic microzonation: an example from the area damaged by the 6th April 2009 L'Aquila (Italy) earthquake, *B. Geofis. Teor. Appl.*, 52, 513–538, doi:10.4430/bgta0013, 2011.
- Almagià, R.: Studi Geografici Sulle Frane in Italia, XIV (II), Società Geografica Italiana, Roma, 44–47, 1910.
- Benedetti, L., Tapponier, P., King, G. C. P., and Piccardi, L.: Surface rupture of the 1857 southern Italian earthquake, *Terra Nova*, 10, 206–210, 1998.
- Boncio, P., Pizzi, A., Cavuoto, G., Mancini, M., Piacentini, T., Miccadei, E., Cavinato, G. P., Piscitelli, S., Giocoli, A., Ferretti, G., De Ferrari, R., Gallipoli, R., Mucciarelli, M., Di Fiore, V., Naso, G., Giaccio, B., Moscatelli, M., Spadoni, M., Romano, G., Franceschini, A., Spallarossa, D., Pasta, M., Pavan, M., Scafidi, D., Barani, S., Eva, C., Pergalani, F., Compagnoni, M., Campea, T., Di Bernardino, G. R., Mancini, T., Marino, A., Montefalcone, R., and Mosca, F.: Geological and geophysical characterization of the Paganica–San Gregorio area after the April 6, 2009 L'Aquila earthquake (Mw 6.3, central Italy): implications for site response, *B. Geofis. Teor. Appl.*, 52, 491–512, doi:10.4430/bgta0014, 2011.
- Castellaro, S. and Mulargia, F.: Vs30 estimates using constrained H/V measurements, *B. Seismol. Soc. Am.*, 99, 761–773, doi:10.1785/0120080179, 2009.
- Castro, R. R., Mucciarelli, M., Pacor, F., and Petrucci, C.: S-waves response estimates using Nakamura's technique, *B. Seismol. Soc. Am.*, 87, 256–260, 1996.
- Cello, G., Tondi, E., Micarelli, L., and Mattioni, L.: Active tectonics and earthquake sources in the epicentral area of the 1857 Basilicata earthquake (southern Italy), *J. Geodyn.*, 36, 37–50, doi:10.1016/S0264-3707(03)00037-1, 2003.
- Chatelain, J. L., Guillier, B., Cara, F., Duval, A. M., Atakan, K., and Bard, P. Y.: Evaluation of the influence of experimental conditions on H/V results from ambient noise recordings, *B. Earthq. Eng.*, 6, 33–74, doi:10.1007/s10518-007-9040-7, 2008.
- D'Addezio, G., Karner, D. B., Burrato, P., Insinga, D., Maschio, L., Ferranti, L., and Renne, P. R.: Faulted Middle Pleistocene tephra layer in the Val d'Agri area (southern Italy), *Ann. Geophys.-Italy*, 49, 1029–1040, 2006.

- de Bari, C., Lapenna, V., Perrone, A., Puglisi, C., and Sdao, F.: Digital photogrammetric analysis and electrical resistivity tomography for investigating the Picerno landslide (Basilicata region, southern Italy), *Geomorphology*, 133, 34–46, doi:10.1016/j.geomorph.2011.06.013, 2011.
- Galli, P. A. C., Giocoli, A., Peronace, E., Piscitelli, S., Quadrio, B., and Bellanova, J.: Integrated near surface geophysics across the active Mount Marzano Fault System (southern Italy): seismogenic hints, *Int. J. Earth Sci.*, 103, 315–325, doi:10.1007/s00531-013-0944-y, 2014.
- Gallipoli, M. R., Lapenna, V., Lorenzo, P., Mucciarelli, M., Perrone, A., Piscitelli, S., and Sdao, F.: Comparison of geological and geophysical prospecting techniques in the study of a landslide in southern Italy, *J. Environ. Eng. Geoph.*, 4, 117–128, 2000.
- Gallipoli, M. R., Giocoli, A., and Piscitelli, S.: Joint application of low-cost, fast executable and non-invasive geophysical techniques during emergency and microzonation study: hints from L'Aquila (Italy) earthquake, in: *Proceedings of the 4th International Conference on Site Characterization 4 – ISC-4*, Pernambuco, Brazil, 18–21 September 2012, 2, 1477–1484, 2013.
- Giano, S. I., Maschio, L., Alessio, M., Ferranti, L., Improta, S., and Schiattarella, M.: Radiocarbon dating of active faulting in the Agri high valley, southern Italy, *J. Geodyn.*, 29, 371–386, doi:10.1016/S0264-3707(99)00058-7, 2000.
- Giocoli, A., Magri, C., Piscitelli, S., Rizzo, E., Siniscalchi, A., Burrato, P., Vannoli, P., Basso, C., and Di Nocera, S.: Electrical Resistivity Tomography investigations in the Ufita Valley (southern Italy), *Ann. Geophys.-Italy*, 51, 213–223, 2008.
- Giocoli, A., Galli, P., Giaccio, B., Lapenna, V., Messina, P., Peronace, E., Piscitelli, S., and Romano, G.: Electrical Resistivity Tomography across the Paganica–San Demetrio fault system (April 2009 L'Aquila earthquake, Mw 6.3), *B. Geofis. Teor. Appl.*, 52, 457–469, doi:10.4430/bgta0029, 2011.
- Giocoli, A., Quadrio, B., Bellanova, J., Lapenna, V., and Piscitelli, S.: Electrical resistivity tomography for studying liquefaction induced by the May 2012 Emilia-Romagna earthquake ($M_w = 6.1$, northern Italy), *Nat. Hazards Earth Syst. Sci.*, 14, 731–737, doi:10.5194/nhess-14-731-2014, 2014.
- Guzzetti, F., Cardinali, M., and Reichenbach, P.: The influence of structural setting and lithology on landslide type and pattern, *Environ. Eng. Geosci.*, 2, 531–555, 1996.
- Improta, L., Ferranti, L., De Martini, P. M., Piscitelli, S., Bruno, P. P., Burrato, P., Civico, R., Giocoli, A., Iorio, M., D'addezio, G., and Maschio, L.: Detecting young, slow-slipping active faults by geologic and multidisciplinary high-resolution geophysical investigations:

6283

- a case study from the Apennine seismic belt, Italy, *J. Geophys. Res.*, 115, B11307, doi:10.1029/2010JB000871, 2010.
- Lermo, J. and Chavez Garcia, F. J.: Site effect evaluation using spectral ratios with only one station, *B. Seismol. Soc. Am.*, 83, 1574–1594, 1993.
- Loke, M. H.: Tutorial: 2-D and 3-D Electrical Imaging Surveys, available at: <http://www.geoelectrical.com> (last access: June 2013), 2001.
- Mainsant, G., Larose, E., Brönnimann, C., Jongmans, D., Michoud, C., and Jaboyedoff, M.: Ambient seismic noise monitoring of a clay landslide: toward failure prediction, *J. Geophys. Res.*, 117, F01030, doi:10.1029/2011JF002159, 2012.
- Marcato, G., Mantovani, M., Pasuto, A., Zabuski, L., and Borgatti, L.: Monitoring, numerical modelling and hazard mitigation of the Moscardo landslide (Eastern Italian Alps), *Eng. Geol.*, 128, 95–107, doi:10.1016/j.enggeo.2011.09.014, 2012.
- Martino, S., Moscatelli, M., and Scarascia Mugnozza, G.: Quaternary mass movements controlled by a structurally complex setting in the Central Apennines (Italy), *Eng. Geol.*, 72, 33–55, 2004.
- Maschio, L., Ferranti, L., and Burrato, P.: Active extension in Val d'Agri area, southern Apennines, Italy: implications for the geometry of the seismogenic belt, *Geophys. J. Int.*, 162, 591–609, doi:10.1111/j.1365-246X.2005.02597.x, 2005.
- Moscatelli, M., Pagliaroli, A., Mancini, M., Stigliano, F., Cavuoto, G., Simionato, M., Peronace, E., Quadrio, B., Tommasi, P., Cavinato, G. P., Di Fiore, V., Angelino, A., Lanzo, G., Piro, S., Zamuner, D., Di Luzio, E., Piscitelli, S., Giocoli, A., Perrone, A., Rizzo, E., Romano, G., Naso, G., Castenetto, S., Corazza, A., Marcucci, S., Cecchi, R., and Petrangeli, P.: Integrated subsoil model for seismic microzonation in the Central Archaeological Area of Rome (Italy), *Disaster Advances*, 5, 109–124, 2012.
- Mucciarelli, M.: Jumpin' joy quake, *Seismol. Res. Lett.*, 77, 744–745, doi:10.1785/gssrl.77.6.744, 2007.
- Mucciarelli, M., Bianca, M., Ditommaso, R., Vona, M., Gallipoli, M. R., Giocoli, A., Piscitelli, S., Rizzo, E., and Picozzi, M.: Peculiar earthquake damage on a reinforced concrete building in San Gregorio (L'Aquila, Italy): site effects or building defects?, *B. Earthq. Eng.*, 9, 825–840, doi:10.1007/s10518-011-9257-3, 2011.
- Pantosti, D. and Valensise, G.: La faglia sud-appenninica: identificazione oggettiva di un lineamento sismogenetico nell'Appennino meridionale, in: *Proceedings of the 7th Meeting Gruppo Nazionale di Geofisica della Terra Solida*, Rome, Italy, 205–220, 1988.

6284

- Parolai, S. and Galiana Merino, J. J.: Effect of transient seismic noise on estimates of H/V spectral ratios, *B. Seismol. Soc. Am.*, 96, 228–236, doi:10.1785/0120050084, 2006.
- Perrone, A., Iannuzzi, A., Lapenna, V., Lorenzo, P., Piscitelli, S., Rizzo, E., and Sdao, F.: High-resolution electrical imaging of the Varco d'Izzo earthflow (southern Italy), *J. Appl. Geophys.*, 56, 17–29, doi:10.1016/j.jappgeo.2004.03.004, 2004.
- 5 Perrone, A., Zeni, G., Piscitelli, S., Pepe, A., Loperte, A., Lapenna, V., and Lanari, R.: Joint analysis of SAR interferometry and Electrical Resistivity Tomography surveys for investigating ground deformation: the case-study of Satriano di Lucania (Potenza, Italy), *Eng. Geol.*, 88, 260–273, doi:10.1016/j.enggeo.2006.09.016, 2006.
- 10 Perrone, A., Lapenna, V., and Piscitelli, S.: Electrical resistivity tomography technique for landslide investigation: a review, *Earth Sci.*, 135, 65–82, doi:10.1016/j.earscirev.2014.04.002, 2014.
- Petley, D. N., Mantovani, F., Bulmer, M. H., and Zannoni, A.: The use of surface monitoring data for the interpretation of landslide movement patterns, *Geomorphology*, 66, 133–147, doi:10.1016/j.geomorph.2004.09.011, 2005.
- 15 Roering, J. J., Stimely, L. L., Mackey, B. H., and Schmidt, D. A.: Using DInSAR, airborne, LiDAR, and archival air photos to quantify landsliding and sediment transport, *Geophys. Res. Lett.*, 36, L19402, doi:10.1029/2009GL040374, 2009.
- Saccorotti, G., Piccinini, D., Cauchie, L., and Fiori, I.: Seismic noise by wind farms: a case study from the Virgo Gravitational Wave Observatory, Italy, *B. Seismol. Soc. Am.*, 101, 568–578, doi:10.1785/0120100203, 2011.
- 20 Simoniello, T., Lanfredi, M., Liberti, M., Coppola, R., and Macchiato, M.: Estimation of vegetation cover resilience from satellite time series, *Hydrol. Earth Syst. Sci.*, 12, 1053–1064, doi:10.5194/hess-12-1053-2008, 2008.
- 25 Siniscalchi, A., Tripaldi, S., Neri, M., Giammanco, S., Piscitelli, S., Balasco, M., Behncke, B., Magri, C., Naudet, V., and Rizzo, E.: Insights into fluid circulation across the Pernicana Fault (Mt. Etna, Italy) and implications for flank instability, *J. Volcanol. Geoth. Res.*, 193, 137–142, doi:10.1016/j.jvolgeores.2010.03.013, 2010.
- Stabile, T. A., Giocoli, A., Lapenna, V., Perrone, A., Piscitelli, S., and Telesca, L.: Evidences of low-magnitude continued reservoir-induced seismicity associated with the Pertusillo artificial lake (southern Italy), *B. Seismol. Soc. Am.*, 104, 1820–1828, doi:10.1785/0120130333, 2014a.
- 30

6285

- Stabile, T. A., Giocoli, A., Perrone, A., Piscitelli, S., and Lapenna, V.: Fluid injection induced seismicity reveals a NE dipping fault in the southeastern sector of the High Agri Valley (southern Italy), *Geophys. Res. Lett.*, 41, 1–8, doi:10.1002/2014GL060948, 2014b.
- Strozzi, T., Delaloye, R., Kääb, A., Ambrosi, C., Perruchoud, E., and Wegmüller, U.: Combined observations of rock mass movements using satellite SAR interferometry, differential GPS, 5 airborne digital photogrammetry, and airborne photography interpretation, *J. Geophys. Res.*, 115, F01014, doi:10.1029/2009JF001311, 2010.
- Tropeano, M., Cilumbriello, A., Sabato, L., Gallicchio, S., Grippa, A., Longhitano, S. G., Bianca, M., Gallipoli, M. R., Mucciarelli, M., and Spilotro, G.: Surface and subsurface of the Metaponto Coastal Plain (Gulf of Taranto – southern Italy): present-day- vs LGM-landscape, *Geomorphology*, 203, 115–131, doi:10.1016/j.geomorph.2013.07.017, 2013.
- 10 Zembo, I.: Stratigraphic architecture and quaternary evolution of the Val d'Agri intermontane basin (southern Apennines, Italy), *Sediment. Geol.*, 223, 206–234, doi:10.1016/j.sedgeo.2009.11.011, 2010.

6286

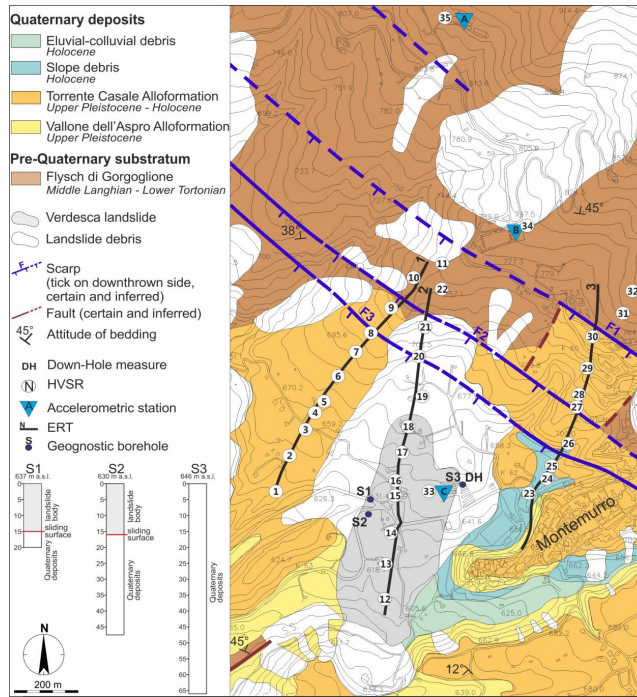


Figure 2. Simplified geological map of the study area showing the distribution of the scarp, the Verdesca landslide, the location of the surveys and the three simplified borehole logs.

6289

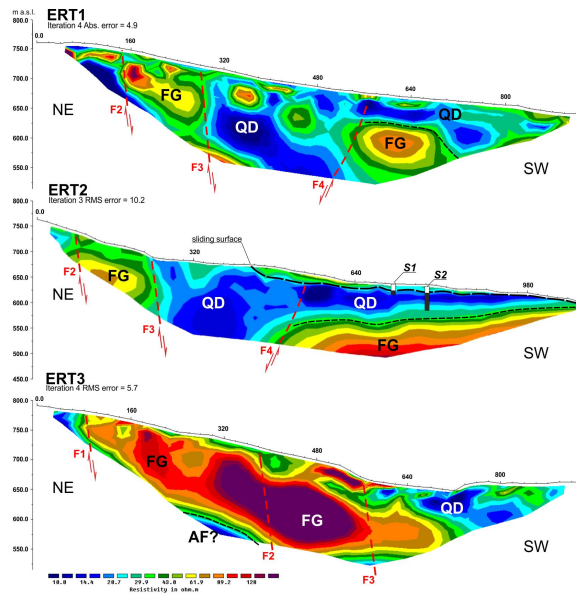


Figure 3. Resistivity models (see Fig. 2 for the location of ERT profiles).

6290

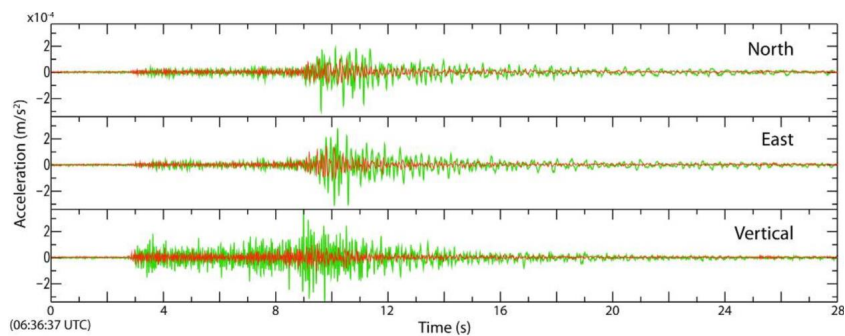


Figure 4. Comparison between waveforms of the MI=2.7 18 February 2011 Potenza earthquake recorded inside the landslide body (green curve, accelerometric station C) and on the bedrock (red curve, accelerometric station A).

6291

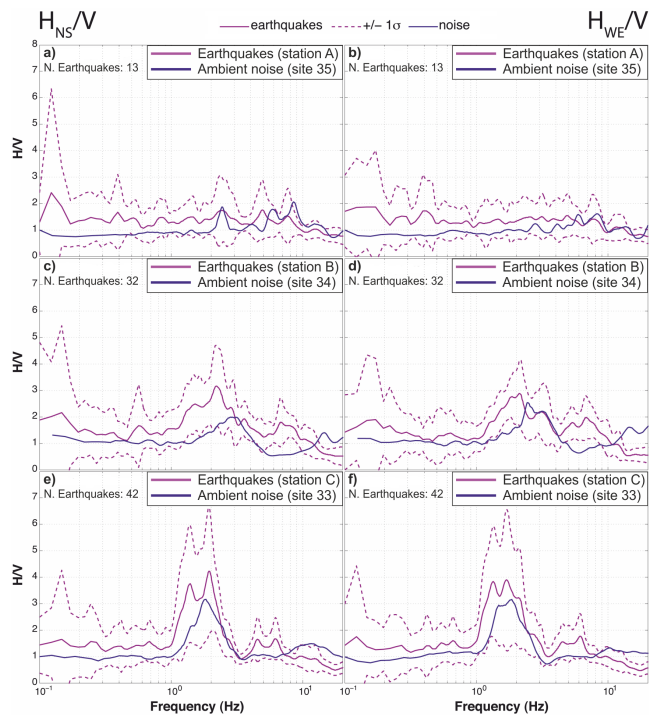


Figure 5. HVSR curves obtained from earthquake data (pink curves) and the ambient noise measurement (blue curves) for both horizontal components (HNS/V, left panels; HWE/V, right panels).

6292

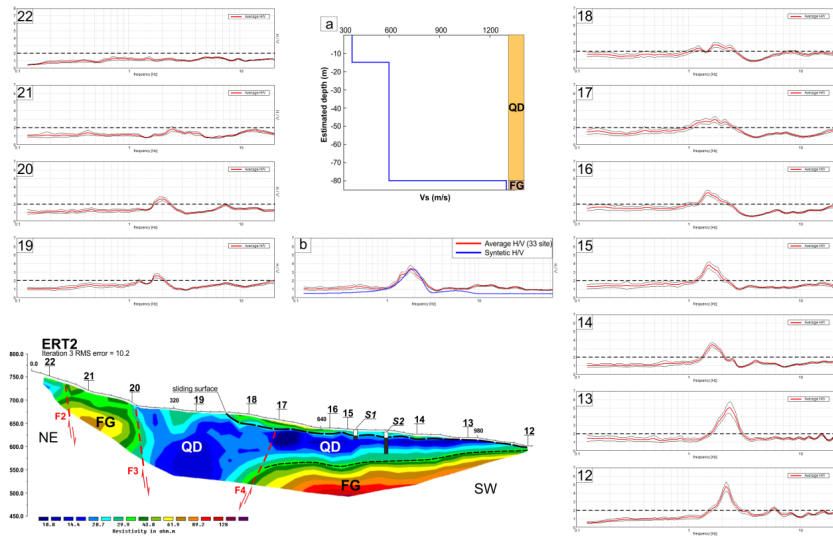


Figure 6. Comparison between the ambient noise HVSR and the ERT2. 18 to 22 indicate the HVSR curves from seismic noise measurements. **(a)** Value of Vs used to constrain the H/V curve. **(b)** Comparison between the synthetic HVSR curve and the ambient noise HVSR curve at the site 33.

6293

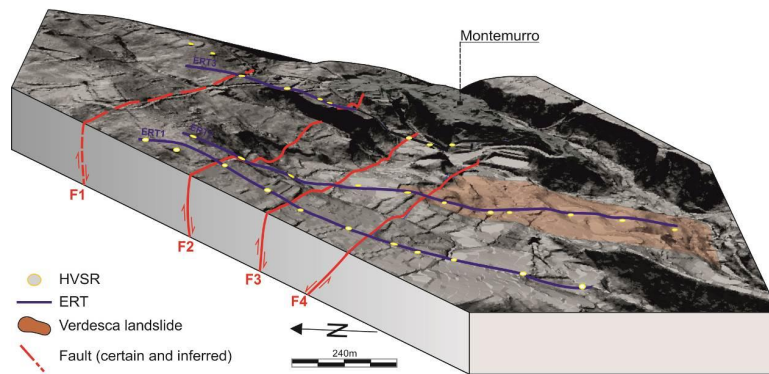


Figure 7. 3-D surface-DEM of the Montemurro area showing the faults and the location of ERT profiles and HVSR.

6294