

Abstract

The objective of this paper is to demonstrate the applicability of Ground Penetrating Radar (GPR) for monitoring the displacement of slow-moving landslides. GPR data is used to estimate the vertical movement of rotational slides in combination with other
5 surveying techniques. The experimental site is located along the Normandy coast (North East France) here several rotational landslides are continuously affected by a seasonal kinematic pattern (low displacement rates of 0.01 to 0.10 m yr^{-1}) and periodically by major acceleration events (high displacement of 1.0 to 7.0 m per event).

1 Introduction

10 Slow-moving landslides can present highly variable displacement fields. Typically, rotational landslides are confined by a circular basal slip surface and are affected by vertical movement upslope and horizontal movement downslope (Fig. 1). The direction and magnitude of the displacement components vary in space and time according to the bedrock geometry and the slope topography. In order to estimate the displacement
15 rates at high accuracy (e.g. infra-centimetric), several geodetical ground-based techniques can be considered (Fig. 1) including GNSS, high-precision topographic levelling (Coltorti et al., 1985) and total station surveys (Tsai et al., 2012). These techniques, however, provide variable precisions (Travelletti et al., 2012). Topographic levelling is the most accurate technique for measuring the displacement in the vertical component
20 with precision of the order of 1 mm ; differential GNSS is the most precise technique for measuring the horizontal displacement (E–W and N–S components; Malet et al., 2002). However, in some landslide case studies, these classical investigation tools are not suitable or insufficiently precise because of difficult environmental conditions (dense vegetation, buildings), complex accessibility (private properties) or too small
25 displacement rates. To overcome some of these difficulties, Ground Penetrating Radar (GPR) is used to provide precise information on the vertical motion of ground structures

7489

over a period of several years. GPR observations allow mapping horizontal and vertical discontinuities and fractures at the sub-surface (Deparis et al., 2007). The tracking of these discontinuities in time provides an indirect measurement of the subsidence of the buried ground structures. Over the last decade, GPR observations were frequently
5 used in landslide research for identifying the geometry of the bedrock (Grandjean et al., 2000; Bichler et al., 2004; Sass et al., 2008), characterizing the pattern of sub-surface fractures (Deparis et al., 2007), and estimating the layering of buried structures (Gutierrez et al., 2011; Carpentier et al., 2012). GPR observations are limited to the analysis of hard rocks and coarse or consolidated sediments because of the attenuation of the
10 radar signal in clay-rich material and in soils with a high saline groundwater content (Annan, 2005; Jeannin et al., 2006).

In our experiment, GPR observations are used for monitoring the vertical displacement of the “Cirque des Graves” (Fig. 2b) and the “Chant des Oiseaux” (Fig. 2c) landslides for the period 1980–2010 (Ballais et al., 1984; Flageollet et al., 1987; Maquaire,
15 1990). Since January 1982, the movements induced many damages and repairs of the road crossing the landslides. The landslide motion is complex and associates a seasonal kinematic regime (subsidence of a few centimeters per year) and an event-type kinematic regime (with major acceleration events of several decimeters per event).

The multiple repairs of the road pavement has created a succession of road structures characterized by variation in soil density. The evolution in time of this layering, which can be detected by GPR observations, is used to infer the vertical displacement rates. The geotechnical structure of the road is adapted to a good GPR signal-to-noise ratio as it associates a foundation layer and a pavement layer with gravel and compacted sand.
20

25 In this paper, we illustrate how the GPR can be used as a complementary tool to traditional geodetic measurements for estimating vertical displacement rates along cross-sections. We first detail the proposed methodology for detecting and locating the different road layers. Second, we interpret the position of the buried structures and quantify their displacement in time (for a period of 30 years). Finally, we compare the

7490

GPR-derived displacements to the displacements monitored at the surface with other surveying techniques.

2 Study area

The study area is located at the western margin of the sedimentary Paris Basin (Northern France) in Normandy. On the edges of the Pays d'Auge plateau (Fig. 2a), in a coastal area below 140 m a.s.l., several active landslides have induced frequent damages to the roads and buildings for the last twenty years. The two main unstable slopes are the "Cirque des Graves" landslide (Villerville; Fig. 2a and b) which is the largest, (47 ha; ≈ 20 m depth in 2012), most active and most documented landslide of the region (Maquaire, 1990; Lissak, 2012) and the "Chant des Oiseaux" landslide (Trouville; Fig. 2a and c) which is smaller in size (20 ha, ≈ 20 m depth in 2012).

2.1 Geology and geomorphology

The "Cirque des Graves" and the "Chant des Oiseaux" landslides are located on low elevation convex-concave slopes. They present a complex morphology with a succession of multiple and embedded rotational slumps (Fig. 1). Typical morphological features testifying the presence of circular slip surfaces are observed, such as scarps of various sizes (Fig. 2b and c), open fissures, small grabens and counter-slopes. The two landslides are delineated upslope by a major scarp (5–10 m high) cut in the Cenomanian chalk formation (Lissak et al., 2014), and downslope by a rocky reef in the Oxfordian sandstone formation. From the bottom to the top, the lithostratigraphic profile consists in Jurassic sedimentary rocks with superimposed strata of almost 10 m thick Oxfordian sandstone (plunging gently to the South-East at 15%), Kimmeridgian marls (25 m thick), a layer of Albian sands (2–5 m thick) and Cenomanian chalk which thickness can exceed 50 m on the plateau (Fig. 2a).

7491

2.2 History of development

The "Cirque des Graves" and the "Chant des Oiseaux" slopes are continuously active landslides with displacement rates in the range $1\text{--}10\text{ cm yr}^{-1}$ on average. As a consequence of this slow movement, a continuous subsidence of the upper part of the landslides is observed causing small deformation of the road pavements and yearly repairs (Fig. 3). The landslides is also episodically affected by large acceleration as it was observed at the "Cirque des Graves" landslide in January 1982, February 1988, March 1995 and March 2001. During these events, displacements of up to several decameters and major changes of the slope topography (retrogression of the main scarp, creation of new secondary scarps) were observed, and major changes (Fig. 3b). As a consequence of these failures several houses and road sections were damaged or destroyed.

3 Methods

3.1 Displacement monitoring network

After the large failure event of January 1982 at the "Cirque des Graves" landslide, the authorities in charge of the road traffic installed a monitoring network on both sides of the RD513. The monitoring network consisted of four fixed observation points (PT 1-1' at both sides of the cross-section S1; PT 2-2' at both sides of the cross-section S2; Fig. 2a). The position of the points was measured every 3–5 months using total stations with a sub-centimeter accuracy. In 2008 and 2009, a network of 24 benchmarks was installed at the "Cirque des Graves" landslides to cover a larger area. Two cemented benchmarks were installed at the landslide boundary of the landslide (no. 407, no. 408; Fig. 2a) close to the previous observation point PT 1-1'. The position was measured by dGPS campaigns (Trimble R5) four times per year. The protocol consisted in 15 min observation time at each benchmark using a real-time kinematic mode; the position

7492

the eastern part that progressively decreases westward. The top of the 1982 road is located at 3 m depth. The top of the 1988 road is at a maximum depth of 2.40 m and the top of the 1995 road is at a maximum depth of 1.40 m.

For the cross-section S3, located at the “Chant des Oiseaux” landslide (Fig. 6), this structure is also visible with a clear distinction between the “uncollapsed road” and the “collapsed road”. Between 22 and 47 m distance, the thickness of the road exceeds 3 m. Only a few information on the landslide kinematic pattern was available for this landslide, as no major slope failure was precisely dated. Consequently we cannot define the year of the pavement. However, the determined depths are quite similar to the depths identified at the “Cirque des Graves”.

4.2 Kinematics of the landslides over the period 1982–2010

The depths of the different layers identified on the GPR cross-sections are compared to the levelling data available for the period November 1982–April 1995. Figure 7 indicates a motion characterized by a constant displacement rate during 14 years and two major slope failures (February 1988, March 1995) with higher displacement rates. In between the two slope failures of May 1988 and April 1994, a subsidence of 0.25 m is measured at point PT 2-2', corresponding to a subsidence rate of 2–3 cm yr⁻¹. At the contrary, during the slope failures, 30–40 cm of collapse are reported (Lissak et al., 2013).

Between 2008 and 2012, during a period of low landslide activity, the subsidence of the road was monitored by dGPS campaigns with a network of 24 benchmarks. The results of measurement (2009–2012) of only two of them are presented in this paper (Fig. 7). The up component (vertical) of the landslide movement is usually the most difficult to measure by dGPS because of the geometry of the satellite constellation (Malet et al., 2002). Consequently, the precision of the dGPS measurements is not sufficient to quantify accurately the displacement for 15 min short period acquisitions. Nevertheless, the recent activity of the landslides is clearly identifiable and can be measured through the monitoring of several fissures along the road. A subsidence rate of 1–2 cm yr⁻¹ is defined for the period 2008–2012.

7495

The combination of geophysical and geodetic surveying techniques provides an estimation of the total subsidence of the slopes since 1982. The results include the first reactivation of the “Cirque des Graves” landslide for which no data was available before the GPR surveys. In this way, since January 1982, we can estimate a total collapse of the road comprised between 1.80 and 2.20 m at point PT 1-1', and between 2.40 and 2.60 m for point PT 2-2'. These values integrate the seasonal activity of the landslide between 2 and 4 cm yr⁻¹ and the 4 major slope failure with a major acceleration in January 1982 with 30–40 cm of collapse.

5 Conclusions

The use of the Ground-Penetrating Radar observations for assessing slope dynamics is not very frequent. This technique is usually used to gain knowledge on the internal structures of the slope or to obtain some petrophysical properties of the discontinuities.

Indeed, in our application, the GPR observations were used to detect the total subsidence of a road crossing two slow-moving landslides located along the Normandy coast. The observations also provided also valuable information on the dynamics of the landslide for the last 30 years. The geophysical data are completed by surface displacement measurements. At the “Cirque des Graves” landslide, geodetic measurements were performed between 1982 and 1995 and between 2009 and 2012 to estimate the vertical component of the movement. The results indicate a total collapse comprised between 1.8 and 4.0 m since 1982 for the two landslides. These results consider the seasonal pattern of the vertical movement associating a continuous displacement rate of 2–4 cm yr⁻¹ and 4 major slope failures with displacement up to several decimeters per event.

GPR acquisition and data processing is potentially easy for sub-surface analysis; however this kind of investigation is highly constrained by the overhead wave reflections in complex geological structures, clay-rich material, and woody soils. Consequently, not so many slopes were investigated with this technique. This is the reason why our anal-

7496

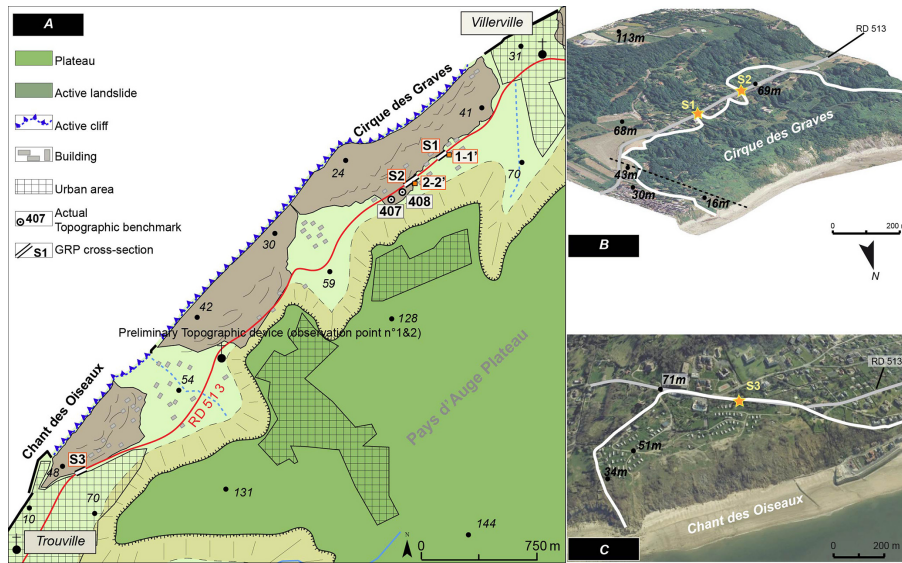


Figure 2. Morphology of the studied landslides. **(a)** Active landslides along the coast between Trouville and Villerville and location of the field investigations. **(b)** Aerial images 2006 of the “Cirque des Graves” landslide at Villerville. **(c)** Satellite view (Image 2014[©] Google Earth) of the “Chant des Oiseaux” landslide at Trouville.

7501

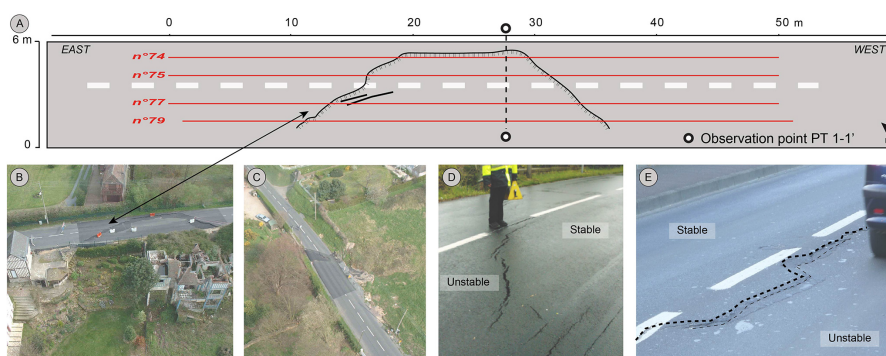


Figure 3. Damages observed along the RD513 road and strategy of GPR data acquisition. **(a)** Example of a GPR cross-section (cross-section S1) along the deformed road (multiple parallel profiles are acquired). **(b)** Oblique picture of the road collapse at the observation point S1 after the March 2001 failure. **(c)** Oblique picture of the road collapse at the observation point S2 after the March 2001 failure. **(d)** Fissures observed along the road at point S2 in 2012. **(e)** Fissures along the road at the point S3 in 2009.

7502

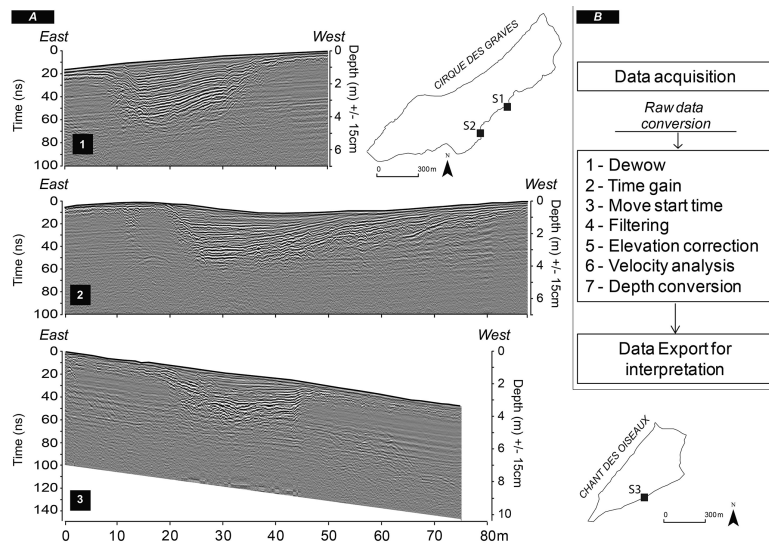


Figure 4. Example of raw GPR observations. (a) Cross-sections S1 and S2 at the “Cirque des Graves” landslide and cross-section S3 at the “Chant des Oiseaux” landslide, (b) GPR observations processing chain.

7503

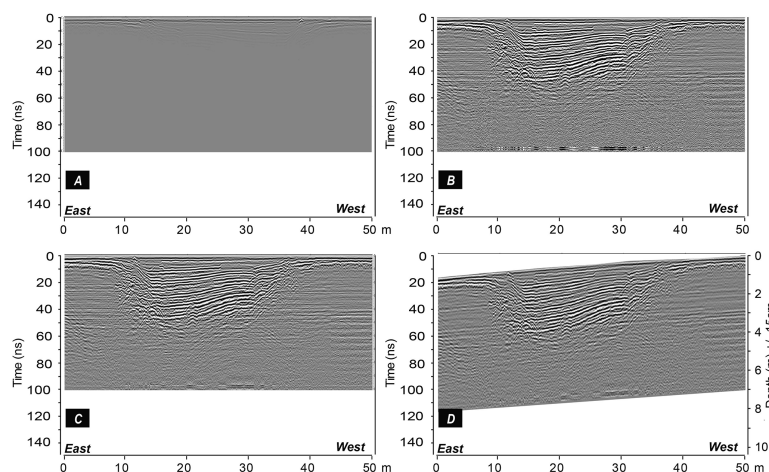


Figure 5. Illustration of the processing chain applied to the GPR observations data acquired with a 500 MHz dipole shielded antenna at profile S1. (a) Raw data, (b) processed data using gain, (c) processed data after band pass filtering, (d) conversion time-depth.

7504

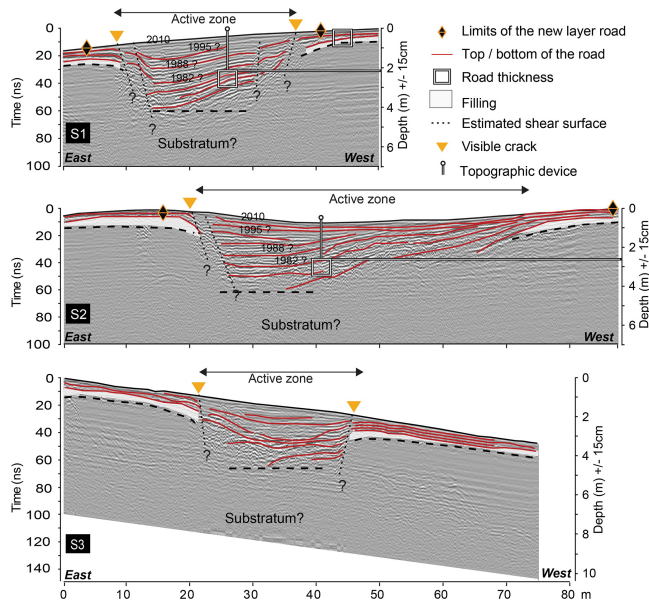


Figure 6. Interpretation of the Ground-Penetrating Radar observations for cross-sections S1, S2 and S3.

7505

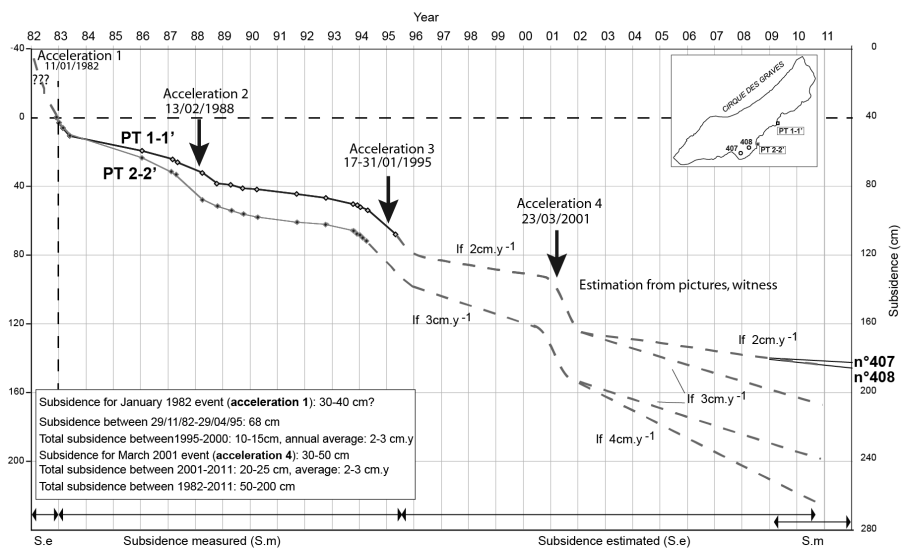


Figure 7. Subsidence of the road measured and estimated between 1982 and 2011.

7506