



1 **The susceptibility assessment of multi-hazard in the Pearl**
2 **River Delta Economic Zone, China**

3

4 Chuanming Ma*, Xiaoyu WU, Bin LI, Ximei Hu

5

6 *Corresponding author at: School of Environmental Studies, China University of Geosciences,
7 Wuhan 430074, China. Tel.: +86-27-67883159. Email: machuanming@cug.edu.cn

8

9



10

11 Abstract

12 The multi-hazard susceptibility assessment can provide a basis to decision-making for
13 land use planning and geo-hazards management. The main scope of this paper is
14 assess multi-hazard susceptibility to identify susceptibility area by using an integrated
15 method of the Analytic Hierarchy Process (AHP) and the Difference Method (MD)
16 within MapGIS environment. The basic principle of this method is to predict future
17 geological hazards based on occurrence mechanism of occurred geological hazards
18 and the geological conditions that caused past geological hazards. Typical geo-hazards
19 susceptibility are separately assessed by applying Analytic Hierarchy Process (AHP).
20 The multi-hazard susceptibility is completed by synthesizing individual geo-hazards
21 susceptibility result with the Difference Method (MD), the multi-hazard susceptibility
22 map is generated by utilizing MapGIS platform. The multi-hazard map can provide
23 decision-makers with visual information for geo-hazards management and land use
24 planning, which reduce confusion of decision-makers on high number of individual
25 geo-hazard map. The study area was categorized into high susceptibility zone,
26 moderate susceptibility zone, low susceptibility zone, and insusceptible zone,
27 accounting for 16.5%, 41.6%, 33.8% and 8.1% of the total study area, respectively.
28 The multi-hazard susceptibility result can be combined with other conditions to
29 provide decision- makers with theoretical basis for geo-hazards management and
30 planning of development.

31

32 **Key words:** susceptibility assessment; mul-hazards; Analytic Hierarchy Process
33 (AHP) - Difference (DM); MapGIS; The Pearl River Delta Economic Zone

34



35

36 **1. Introduction**

37 Geological hazards occur frequently, and the types of disasters in China are various
38 (National Disaster Mitigation Center Disaster Information Department, 2009),
39 especially southwest region of China (Tang and Wu, 1990). The Pearl River Delta
40 Economic Zone is the transitional belt and sensitive belt of geological environment,
41 nears the South China Sea, characterized by strong land-ocean interaction, widely
42 distributed Quaternary, complex geological structure, and various landform. It is
43 susceptible to cause geological disasters (Li, 2012). The Pearl River Delta Economic
44 Zone is the pilot area of China's reform and opening and an important economic
45 growth belt, and it plays a pivotal role in the social and economic development and
46 the overall situation of reform and opening, as well as a prominent leading role. 2016
47 annual government report of Guangdong Province states that it will launch a higher
48 level of development in the Pearl River Delta Economic Zone, building the
49 Guangdong-Hong Kong-Macao Greater Bay Area in cooperation with Hong Kong
50 and Macao, and ranking first among all the Bay Areas in the world. With the rapid
51 economic development for the Pearl River Delta Economic Zone, the strength of
52 development and utilization for geological environment trends to increase, the
53 frequency and intensity of geological hazards intensifies rapidly, which has a great
54 threaten upon people's lives and property (Zhang, 2012). The occurrence of
55 geological hazards seriously restricted the urban development and the sustainable
56 development of human society (Unitto and Shaw, 2016). Therefore, in order to
57 minimize the loss of human life and reduce economic consequences, management of
58 geological hazards is essential. Thus, it is very meaning to evaluate geological hazards
59 susceptibility and identify different susceptibility areas for prevention and
60 management of geological disaster.

61 Since geological hazards are complex phenomena, currently, various researches have
62 focused on a single geological hazard research (Komac, 2006; Pradhan et al., 2016;
63 Wang et al., 2015; Zhou et al., 2002). But, one region may suffer from more than one
64 geological hazard. The susceptibility assessment of multi-hazard that consists of
65 relative information of different hazards is important tool for geological management
66 and urban planning. The United Nations (UN, 2002) has emphasized the significance
67 of multi-hazard assessment and referred that it "is an essential element of a safer



68 world in the twenty-first century”. However, multi-hazard susceptibility assessment is
69 a complex process and confronted with a challenges. At early stages, qualitative
70 assessment methods were widely used to evaluate geological hazards susceptibility
71 (Bijukchhen et al., 2013; Cui et al., 2004; Degg, 1992; Liang et al., 2011; Zhou et al.
72 2002), which are based on statistical analysis of the relationship between geological
73 hazards and different controlling factors, but it is difficult to describe the real
74 relationships of different influencing factors and forecast geological hazards. In recent
75 years, with development of science and technology, the methods that combines
76 qualitative and quantitative analysis are widely used to evaluate geological hazards
77 susceptibility (Lee et al., 2018; Wang et al., 2015; Yilmaz, 2009). One widely used
78 method of susceptibility assessment is the Analytic Hierarchy Process (AHP)
79 (Karaman, 2015; Karaman and Erden, 2014; Komac, 2006; Peng et al., 2012; Rozos
80 et al., 2011). The AHP is a multiple criteria decision-making that combines qualitative
81 and quantitative factors for ranking and evaluating alternative scenarios, among which
82 the best solution is ultimately chosen (Satty, 1980; Satty, 2008). Preventive measures
83 for different geological hazard are various, and their damage on environment and
84 people’s lives and property is not neutralized. thus, multi-hazrd assessment is
85 completed by synthesizing all individual geological hazards with the Difference
86 Method. The principle of this method is that the geological hazards susceptibility in
87 this unit is considered high, as long as there is a kind of geological hazard under high
88 susceptibility in specific evaluation unit.

89 In this paper, a new method that integrated the Analytic Hierarchy Process (AHP) and
90 the Difference Method is proposed to assess multi-hazard susceptibility. Individual
91 hazard susceptibility is assessed with via of the Analytic Hierarchy Process (AHP)
92 and spatial analysis of MapGIS, based on the geological hazards investigation and
93 geological environmental conditions of the study area. The difference method is used
94 to assess multi-hazard susceptibility by synthesizing the five aforementioned
95 geohazards susceptibility assessment. Moreover, a multi-hazard susceptibility map is
96 produced with MapGIS. The multi-hazard susceptibility map will benefit local
97 governments in making policies on urban development and infrastructure layout, and
98 it also offer more accurate and effective theoretical and practical guide to land use
99 planning and site selection of major projects, coming true the maximum utilization of
100 limited resources and the maximum economic efficiency with limited environment.




101 **2. The study area**

102 **2.1 Natural geographical conditions**

103 The Pearl River Delta Economic Zone, with a total area of 41698 km², is located in
104 the south-central Guangdong Province, China (Fig.01), nears the South China Sea,
105 between 21°43' ~ 23°56' N latitude and 112°00' ~ 115°24' E longitude. It includes 9
106 prefecture-level cities.

107

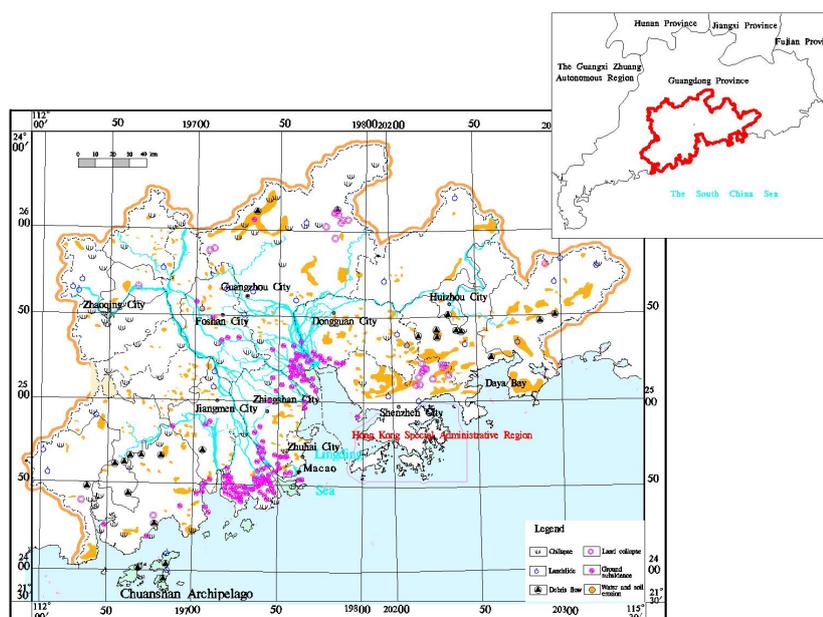


108

109 Fig.01 The map of the study area in The Pearl River Delta Economic Zone

110

111 The study area belongs to subtropical monsoon climate, characterized by mild, humid
112 and abundant rainfall. The rainfall is characterized by large precipitation, more rainy
113 days, stronger seasonal rainfall, and uneven spatial distribution under influence of
114 monsoon climate. The annual precipitation is reported as about 1800-2200mm
115 (Fig.02).

116

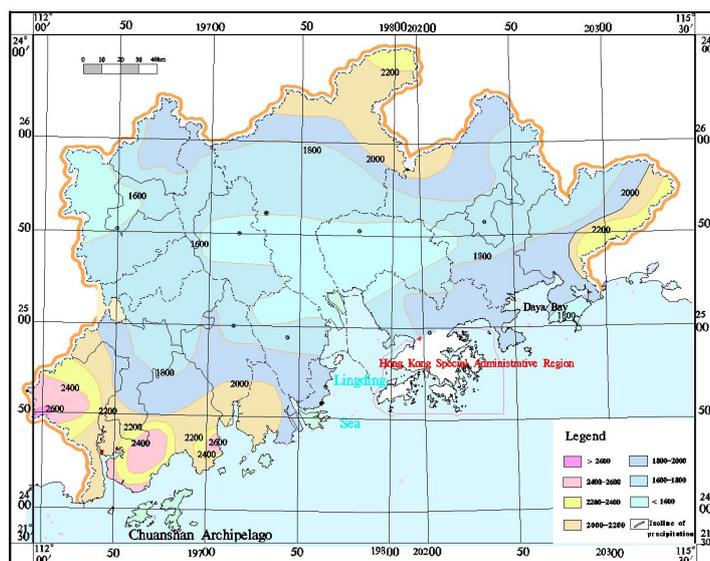


117

118 Fig.02 The precipitation map of the study area

119

120 The topography is dominated by the Pearl River delta plain, surrounded by
121 intermittent mountain and hills, such as Gudou Mountain, Tianlu Mountain and Luofu
122 Mountain. The terrain is smooth, ranging in altitude from -0.2 m to 0.9 m in the plain
123 area. Based on the different genetic type, the geomorphic units are divided into 12
124 kinds of level II geomorphological units, consisting of erosion and denudation
125 middle mountains, erosion and denudation low mountains, erosion and denudation
126 hills, erosion and denudation platforms, karst hills, volcanic hills, delta plain, alluvial
127 and marine deposition plain, alluvial plain, alluvial and dilluvial plain, marine
128 deposition plain and islands.

129

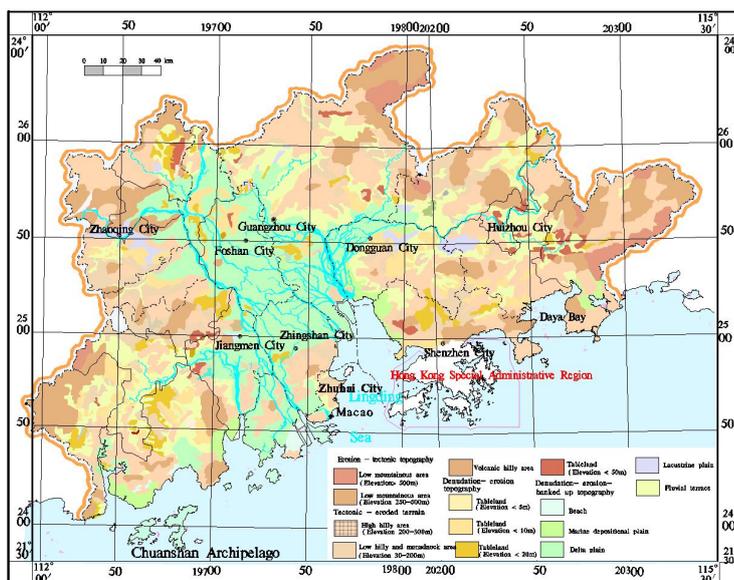


130
 131 Fig.03 The topography map of the study area

132
 133 **2.2 Geological conditions**

134 Development of the strata is relatively complete, and it is characterized by
 135 complicated types and the wide distribution. The stratigraphic age of the outcropped
 136 bedrock ranges from the oldest Metamorphic rocks to the latest Quaternary loose
 137 debris deposition rocks, the outcropped strata is mainly Quaternary, followed by the
 138 Sinian, Cambrian, Devonian, Carboniferous, Jurassic and Cretaceous. The distribution
 139 for Mesoproterozoic, Ordovician, Permian and Paleogene are sporadic. The
 140 outcropped Quaternary loose area accounts for 3/4 of the strata area, the outcropped
 141 bedrock area accounts for 1/4 of the strata area. The area that develop Magmatic rocks
 142 accounts for about 30% of the entire study area, dominated by intrusive rocks, and
 143 volcanic rocks only develop in small areas.

144

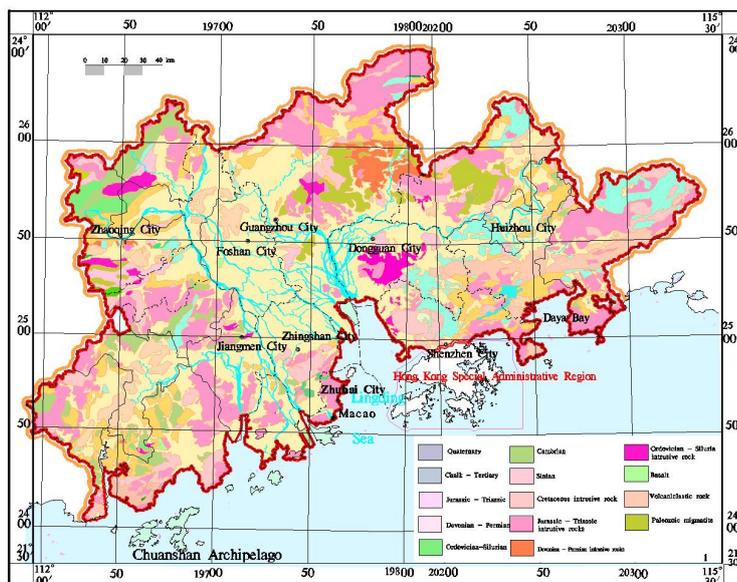


145
 146 Fig.04 The geological map of the study area

147

148 **2.3 Hydrogeological conditions**

149 In the study area, groundwater is divided into three types: loose rock pore water,
 150 carbonate karst water and bedrock fissure water, hydrogeological characteristics are
 151 shown in Fig.05.

152

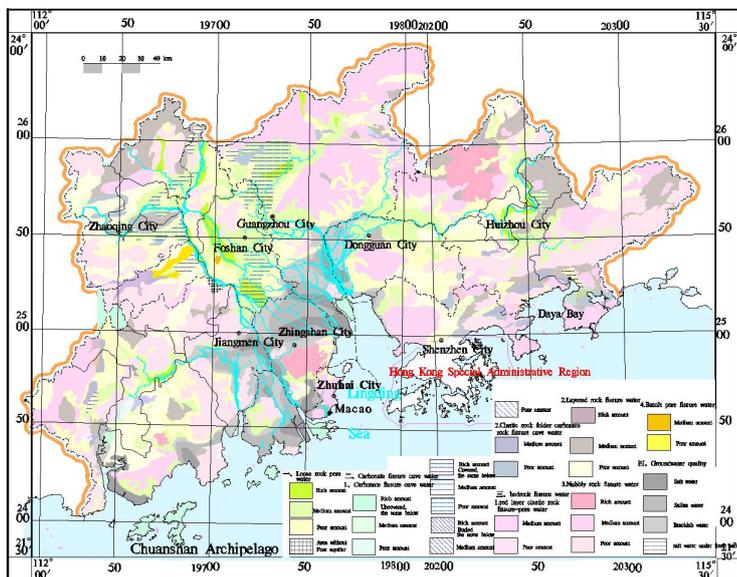

153




154 Fig.05 The hydrogeological map of the study area

155

156 2.4 Engineering geological condition

157 The rock-soil body is restricted by the topography, stratum, lithology, geological
158 structure, and it is also affected by the hydrogeological conditions, natural geological
159 conditions within the study area. Based on the nature, origin and structural features of
160 the rock-soil body, the rock-soil body is divided into three types: magmatic rocks,
161 metamorphic rocks and sedimentary rocks. In addition, it can be also divided into
162 gravel soil group, sandy soil group, clay soil group and intrusive rock residual soil
163 group, extrusive rock residual soil group and metamorphic rock residual soil group
164 (Fig.06).

165

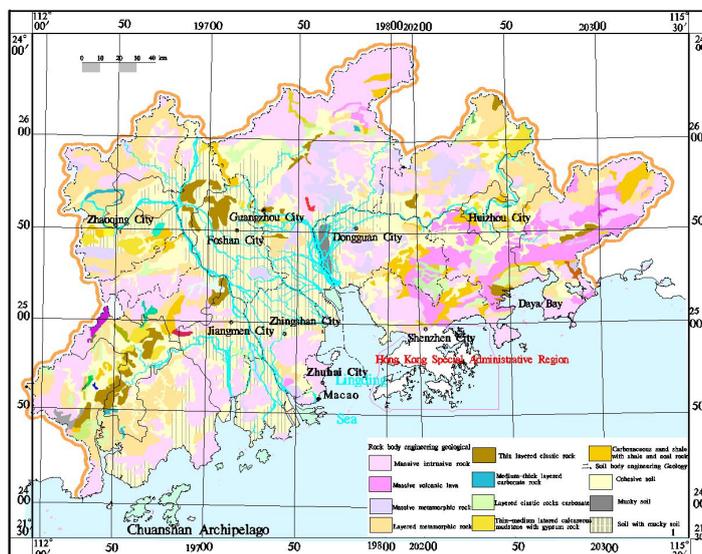

166

167 Fig.06 The engineering geological map of the study area

168

169 2.5 The major geological hazards

170 According to a field geological survey, typical geological hazards that occurred within
171 the study area mainly consist of collapse, landslide, ground subsidence, karst collapse,
172 water and soil loss, and seawater intrusion. As of 2014, there are 52 large-scale
173 collapses, 35 landslides and 5 debris flow have been found in the study area. In
174 addition to, 129 ground subsidence hazards occurred in the study area, among of them,




175 there are 76 ground subsidence with less than 10 cm of accumulative subsidence are
176 found within the study area. Water and soil erosion is fragmented distributed in
177 mountainous areas, hilly areas and tableland areas, which are characterized as karst
178 desertification, granite and less vegetation. In addition, it is widely distributed in
179 Longgang District, Shenzhen City and Huadu District, Guangzhou City. According to
180 statistics, water and soil erosion covers an area of 2300km², accounting for about
181 4.8% of the total land area. The seawater intrusion mainly occurred in the Pearl River
182 Estuary area. The scope of the annual seawater invasion spread to Yaxi Town -
183 Hualong Town - Humen town area. It spread to the inland area, and it possibly
184 reached Guangzhou City during the drought years. According to the research (Liu
185 2004), the driving forces of seawater intrusion for the study area are mainly tides and
186 runoff, followed by saltwater tides. The distribution for geological hazards is shown
187 in Fig.1.

188 **2.6 Human activity characteristics**

189 Except for the Pearl River Delta plain located in the hinterland, other lower-lying hills
190 or platforms can be reclaimed into dry land that is suitable for planting various crops,
191 fruit trees and economic trees. In recent years, with the rapid economic development,
192 the land-use structure has changed significantly. The area of cultivated land and
193 garden plot are declining year by year, and the construction land rapidly expand. In
194 the background of rapid economic and social development, the land use structure still
195 will has a great change in the future, and "the expansion of land for urban
196 construction, the massive loss of cultivated land and garden plot" will be the main
197 features.

198

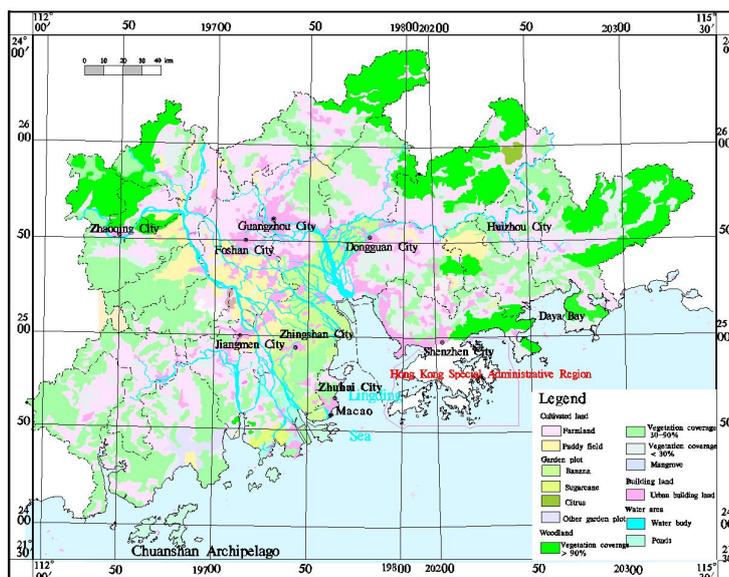

199
200 Fig.7 The land use map of the study area

201

202 3. Materials and methods

203 3.1 Methods

204 Geological hazards causal factors

205 (1) Karst collapse causal factors

206 Obtained research results (Su, 1998; Wang, 2001) show that the formation of karst
207 collapse is mainly affected by degree of karst development, overburden characteristics,
208 geological structure, and groundwater activities. Karst development is basis and
209 prerequisite for formation of karst collapse. Overburden is material basis for
210 formation of karst collapse and controls its formation in certain degree. Large
211 overburden thickness can effectively disperse pressure of the soil body on the soil
212 hole. Compared with the thinner overburden, the larger overburden thickness is less
213 prone to karst collapse, and the scale and form of karst collapse also are closely
214 connected with the overburden thickness. Groundwater activities is the main power
215 producer to cause karst collapse. Geological structure can control the development of
216 karst and can provide a good site for soil erosion, and the spatial distribution of karst
217 development is also closely related to the geological structure. In general, the
218 stretching direction of the karst collapse area is consistent with that of the geological
219 structure (Fu, 2009). Based on the above analysis and geological environmental



220 conditions for the study area, the causal factors of karst collapse include the degree of
221 karst development, lithology, overburden thickness, aquifer water yield property and
222 the distance to the fault.

223 (2) Landslide and collapse causal factors

224 Collapses differ from landslides obviously in the form of occurrence, scale and
225 perniciousness, but there are also internal relations and transformation relations
226 between them, which make them have strong consistency in space-time distribution.
227 Collapses usually happen accompanied occurrence of landslides, and collapses occur
228 frequently in the area where landslides happen. Moreover, the causal factor of
229 collapses occurrence maintain basically consistency with that of landslides. Thus, this
230 paper carries out the susceptibility assessment of collapses and landslides.

231 According to the statistical analysis of geological disasters, the spatial distribution
232 characteristics of collapse are affected by topography, geological structure,
233 stratigraphic lithology and climatic and hydrological conditions. Moreover, there was
234 a positive correlation between the number of annual collapse and temporal distribution
235 of precipitation (Deng, 2008). Topography conditions are the prerequisites for
236 formation of landslide hazards (Li, 1996). Topographic differences provide
237 gravitational potential energy for instability movement of rock and soil body.
238 Geological conditions, characteristics of rock and soil body and hydrological
239 conditions also play key role in controlling slope instability. Based on analyzing
240 formation conditions and development characteristics of collapses and landslide
241 which occurred within the study area, main causal factors of collapses and landslides
242 include topography, lithology, the distance to fracture and precipitation.

243 (3) Ground subsidence causal factors

244 The mollisol is prerequisite factor for controlling the formation of ground subsidence,
245 so the area distributed with mollisol is considered as study range for ground
246 subsidence susceptibility. Geological settings are primary internal factor. The mollisol
247 distributes in the entire delta alluvial plain, and its thickness trends to increase from
248 the top to the front of the delta. The ground subsidence frequently occur in the central
249 and southern coastal areas of the study area, where the mollisol is characterized as
250 large thickness, shallow depth and new age of deposits formation. In general, the
251 degree of ground subsidence is closely related to the characteristics of millisol,
252 primarily including the age of millisol deposition, the thickness of millisol layer,
253 depth of millisol and the thickness of overburden. Hydrogeological conditions are



254 triggering factor for formation of ground subsidence. The ground subsidence mainly
255 occur in clay layer, and it is extremely sensitive to the change of groundwater table.
256 Thus, investigating the distribution characteristics of groundwater is prerequisite to
257 study ground subsidence. Stronger aquifer water yield property means larger
258 allowable exploit amount of groundwater, that is, the susceptibility of ground
259 subsidence is larger. According to survey result, it is found that ground subsidence
260 mostly occurred in the groundwater runoff area, and it distributed along the stretching
261 direction of fracture. According to the above analysis and geological investigation
262 result, we can found that the age of millisol deposition, the thickness of deposition,
263 aquifer water yield property and the distance to fracture are main causal factors of
264 ground subsidence.

265 (4) Water and soil erosion causal factors

266 Based on analyzing the occurrence mechanism and formation conditions of water and
267 soil erosion, the casual factors of water and soil erosion consist of topographic, soil
268 type, vegetation type, precipitation and the density of of river network for the study
269 area. Soil is the material basis for water and soil erosion to occur, it is also the object
270 to erosion. Water and soil erosion is mainly distributed on granite-developed soil. The
271 distribution of latosolic red soil is the mostly wide within the study area, accounting
272 for 44.8% of the land area, follow by is paddy soil, accounting for 40.20%. The parent
273 material of latored soil is mainly granite, the granite is characterized by thick
274 weathering soil, loose structure and poor soil viscosity. After destroying the original
275 vegetation and slope conditions, water and soil erosion was caused under the
276 long-term erosion and scour of rainfall. Rugged topography is the direct factor to
277 cause water and soil erosion, the steeper the slope is, the shorter the confluence time
278 is, the larger the runoff energy is, the stronger the erosion of water on the land is.
279 Water and soil erosion mainly occurred in hilly area for the study area. The vegetation
280 is critical factor for controlling the occurrence of water and soil erosion, because it
281 can prevent soil erosion, mainly including reduction for rainfall energy, water
282 retention and anti-erosion. Rainfall is the direct dynamic factor causing water and soil
283 erosion. The annual precipitation 1600 mm within the Delta plain area is less than that
284 of the surrounding hilly area, with annual precipitation of 2000-2600 mm.

285 (5) Seawater intrusion causal factors

286 Hydrodynamic conditions and hydrogeological conditions are two essential factors for
287 controlling the occurrence of seawater intrusion, the hydrodynamic condition means



288 that there is a certain head pressure between seawater and fresh water,
289 hydrogeological conditions is that there is a hydraulic relation between the seawater
290 and the land aquifer. When these two conditions all are available, seawater intrusion
291 trends to occur. Seawater intrusion was caused by the change of hydrodynamic
292 conditions of the coastal groundwater with the study area, major dynamics are tides
293 and runoff. Seawater intrusion only occurred in winter and spring in most of the
294 coastal areas of the study area, because precipitation is small, groundwater is not
295 recharged in time, resulting to lowering of groundwater table, in winter and spring (Sun,
296 2011). So over-exploitation of groundwater can aggravate seawater intrusion.
297 According to geological conditions and the situation of seawater intrusion.
298 Topography, the type of Quaternary sedimentary rock, groundwater table and
299 precipitation are main influencing factors of seawater intrusion.

300 **Application of the analytic hierarchy process**

301 The AHP method, pioneered by Saaty in the 1970s, is a multi-objective decision
302 analysis method that combines qualitative and quantitative analysis. A detailed
303 description of the AHP method is available in Saaty (1980). The procedure for using
304 this method can be summarized as follows (Saaty, 2008): (1) Structuring the decision
305 hierarchy, the assessment object is divided into a few structure layers, namely, the
306 target layer, criterion layer, and element layer. (2) Constructing a series of
307 pair-comparison judgment matrices between factors, and the pairwise comparison
308 employs an underlying nine-point recording assessment to rate the relative importance
309 on a one-to-one basis of each factor. (3) The consistency of pairwise comparison
310 matrix between factors should be measured by the consistency ratio (CR), which is
311 the consistency index of the matrix. And the value of the CR should be no higher than
312 0.1. CR can be calculated by Eq.(1):

$$313 \quad CR = CI / RI \quad (1)$$

314 where RI is the mean random consistency index, which depends on the order of the
315 matrix given in Table 1; CI is the consistency index used to measure the deviation of
316 the matrix, as expressed in Eq.(2):

$$317 \quad CI = \frac{\lambda_{\max} - 1}{n - 1} \quad (2)$$

318 Where λ_{\max} is the largest or principal eigenvalue of the matrix and can be easily
319 calculated from the matrix, and n is the order of the matrix.

320



321 <Table 1>

322

323 (4) The factor weights are obtained through matrix operations, sorting operations and
324 a consistency check.

325 The susceptibility value of individual geological hazard is computed according to the
326 following formula Eq.(3):

$$327 \quad SI = \sum_{i=1}^n R_i W_i \quad (3)$$

328 Where SI denotes the susceptibility value, R and W are ratings and weights of the
329 caused factors, respectively, n is the number of factors.

330

331 **4. Results**

332 **4.1 Assessment of individual geological-hazard susceptibility**

333 According to above analysis, aforementioned causal factors of each geo-hazards is
334 considered as assessment indexes of individual geo-hazards susceptibility. And each
335 index is standardize to a uniform rating scale and each of them is assigned a attribute
336 value shown in Table 2. The weight of factor is assigned by applying AHP shown in
337 Table 2, the consistency ratio (CR) of all judgment matrix is less than 0.1, which
338 indicates that the comparison matrix is consistent.

339


340 <Table 2>

341

342 Based on an established classification criteria of evaluation indexes for geological
343 hazards susceptibility shown in table 2, the susceptibility value was calculated by
344 using Eq.(3). Based on the equidistant division method, the susceptibility value is
345 divided into four classes: lowest, low, high, and highest. Based on classification of the
346 susceptibility value, and the study area is classified into four geo-hazard susceptibility
347 areas accordingly. The susceptibility map of individual geo-hazards is produced
348 within MapGIS 6.7 environment. First, the basic data of the study area are converted
349 to raster images of each factor using the image processing in MapGIS 6.7. Next, the
350 images are reclassified and assigned the corresponding value of each rank using
351 graphics processing. Finally, the susceptibility map is elaborated by overlying ranking
352 maps with the spatial analyst tool of MapGIS 6.7. The susceptibility map of
353 individual geo-hazard is shown in Fig. 08-Fig.12.




354

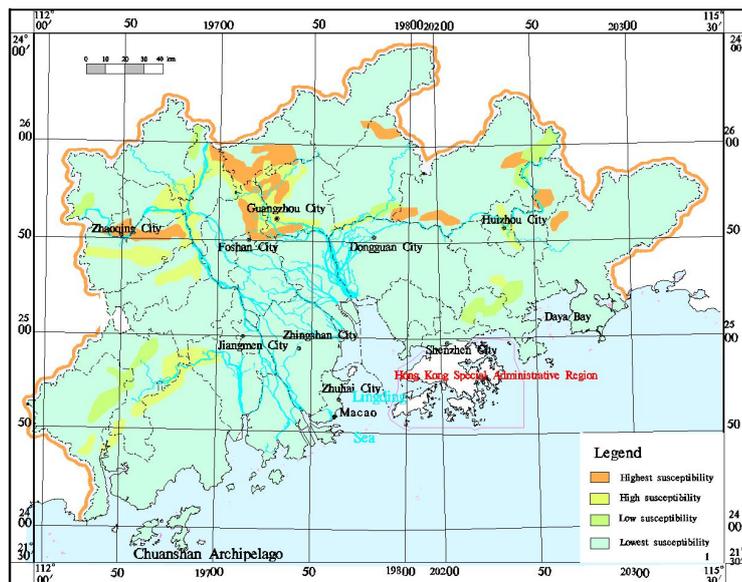

355

356 Fig.08 Karst collapse susceptibility map of the study area


357

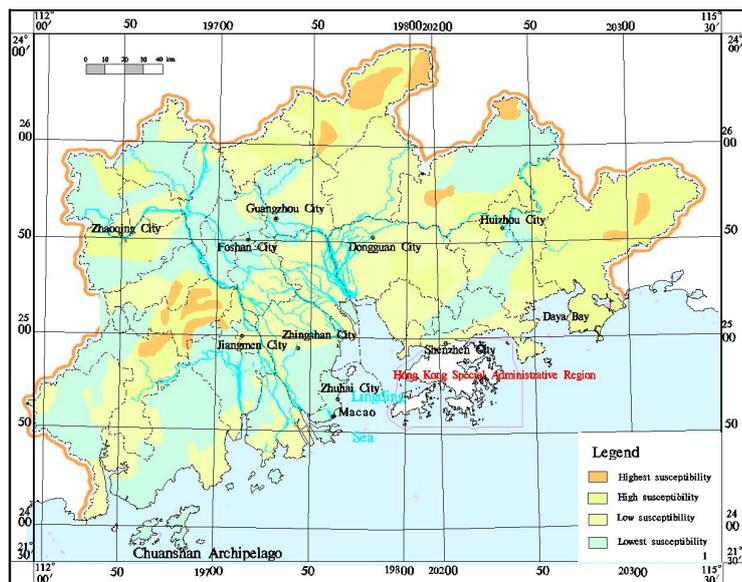

358

359 Fig.09 Collapse and landslides susceptibility map of the study area


360

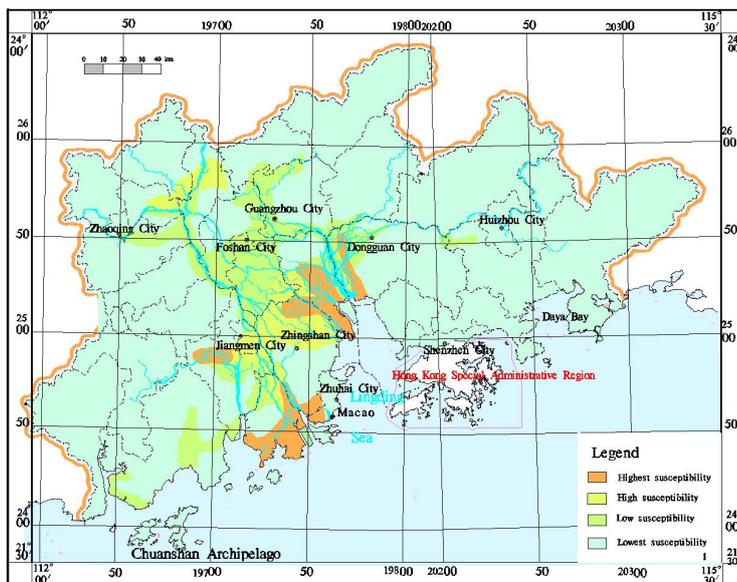

361

362 Fig.10 Ground subsidence susceptibility map of the study area


363

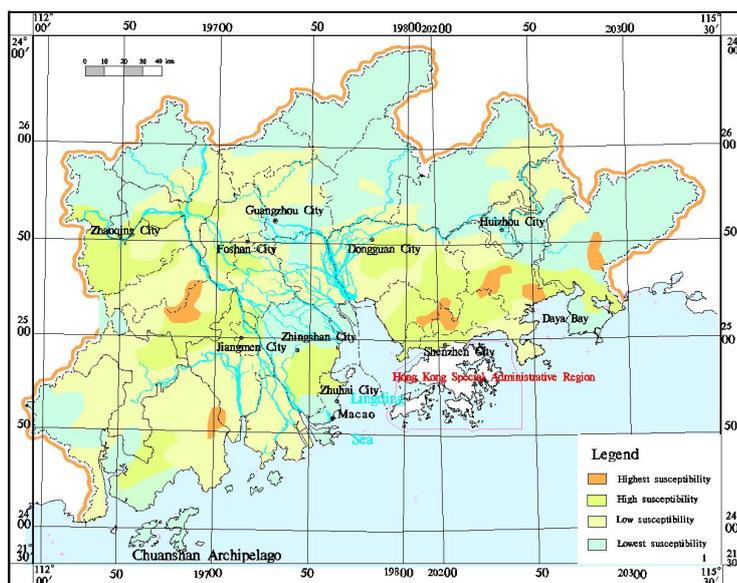

364

365 Fig.11 Water and soil erosion susceptibility map of the study area

366

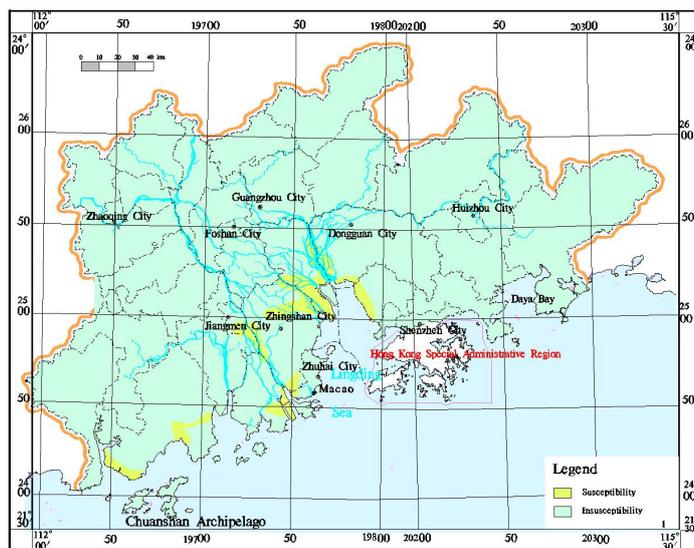

367


368 Fig.12 Seawater intrusion susceptibility map of the study area

369

370 4.2 Assessment of multi-hazards susceptibility

371 Based on the susceptibility assessment of individual geological hazard, the
372 multi-hazard susceptibility is evaluated by using the difference method. Moreover, the
373 multi-hazard susceptibility map for the study area is produced by synthesizing five
374 geo-hazard maps in the MAPGIS 6.7 platform, and this map was further reclassified
375 into four classes: high susceptibility, medium susceptibility, low susceptibility and
376 insusceptible (Fig.13).

377

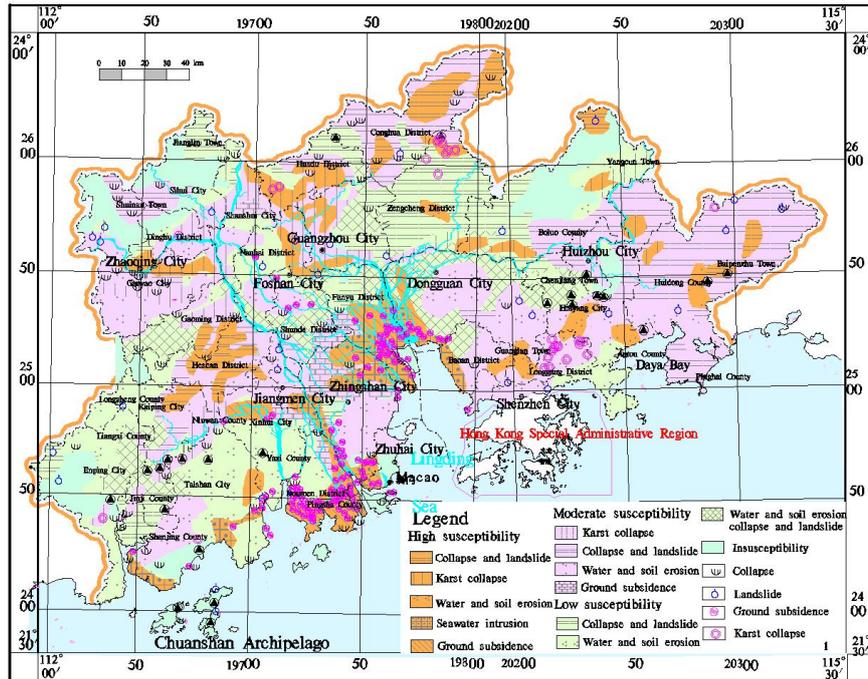

378

379 Fig.13 Comprehensive susceptibility map of geological hazards

380

381 **4.2.1 High susceptibility zones**

382 (1) High susceptibility zone of collapses and landslides

383 This zone is mainly located in the north of Conghua District, Heshan City, the
 384 northern border area of Boluo County and Baipenzhu Town. The zone is mainly
 385 distributed in low mountains and hilly area, which is characterized as steep terrain and
 386 high elevation. The outcropped lithology consists of intrusive rocks and metamorphic
 387 rocks, and metamorphic rocks is characterized as wide distribution, large thickness,
 388 and strong erosion and denudation. Human activities such as slope excavation
 389 contributes to the slope instability under adverse geological conditions. The climate is
 390 complex, with a large annual precipitation, and rainfall is major factor to trigger
 391 geological hazards.

392 (2) High susceptibility zone of karst collapse

393 This zone is mainly located in Huadu District and Nanhai District of Guangzhou City
 394 and Zhaoqing City, few areas of this zone are distributed Boluo County, Huizhou City
 395 and Huidong County. The terrain is relatively flat. This zone is located in hidden karst
 396 areas, so it has the basic conditions for occurrence of karst collapse. So much



397 infrastructure and large-scale construction projects are built in this zone, and intensity
398 of human engineering activities is large. Due to much exploiting of groundwater in
399 the construction of underground engineering, the original balance of rock and soil
400 mechanics has been artificially changed, causing ground subsidence. The change of
401 groundwater table is critical factor to trigger geological hazards in this zone.

402 (3) High susceptibility zone of water and soil erosion

403 This zone is mainly distributed in Guanlan Town, Huiyang District, Heshan City and
404 the eastern area of Taishan City. The engineering geological conditions are complex,
405 the soil is characterized by loose structure, poor soil viscosity and high erodibility,
406 especially in Longgang District and Huiyang District, where natural soil erosion is
407 intense, and the soil are deeply cut by river. Large precipitation, especially heavy rain
408 and intense rainstorm in the summer, has destroyed the original vegetation and slope
409 conditions, and has strong erosion and scour on soil.

410 (4) High susceptibility zone of seawater intrusion

411 This zone is mainly distributed in Zhongshan City, Jiangmen City, Nansha District
412 and Doumen District. This zone is located in delta plain area. A large area of saline
413 water is formed in this zone, where the salinity of groundwater is high, and seawater
414 intrusion occurred in part areas. Due to much exploiting of groundwater in the
415 construction of underground engineering and small annual precipitation, groundwater
416 cannot be recharged in time, causing lowering of groundwater table which is primary
417 reason for seawater intrusion to occur in this zone. Moreover, this zone is susceptible
418 to occur ground subsidence, due to widely distributed mollisol, high water content of
419 mollisol, and high compressibility of mollisol.

420 (5) High susceptibility zone of ground subsidence

421 This zone is mainly distributed in Fanyu District and Niuwan Town and Pingsha
422 Town. This zone is located in delta plain area. The outcropped lithology is mainly
423 sandstone group. The Quaternary sedimentary mollisol with a multi-layer structure
424 and large thickness is widely distributed and is affected by self-weight, resulting in
425 self-weight consolidation. So it is prone to ground subsidence.

426 **4.2.2 Moderate susceptibility zones**

427 (1) Moderate susceptibility zone of collapses and landslides

428 This zone is mainly distributed in Conghua District, Nanshui Town, Kaiping City and
429 the northern area of the study area. This zone is dominated by low mountains and high
430 hills. The lithology mainly consists of intrusive rocks, volcanoclastic rocks and



431 metamorphic rocks, with strong erosion. The annual precipitation is large. The rainfall
432 is the major triggering factor for the occurrence of collapses and landslides.

433 (2) Moderate susceptibility zone of water and soil erosion

434 This zone is mainly distributed in Gaoyao City, Zhaoqing City, Shenjing Town,
435 Heshan City, Jiangmen City, Zhongshan City area, Dongguan City, Longgang District
436 and Huiyang District. This zone is mainly dominated by low mountains, hills and
437 platform. The soil is mostly loamy clay, which is prone to surface loss under lessivage
438 of clay particles. The outcropped lithology mainly consists of intruded rocks, volcanic
439 rocks, and layered clastic rocks with carbonate rocks group. The rainfall has strong
440 erosion and scour on soil. The vegetation coverage is small. The cultivated land is
441 distributed in the Pearl River Delta coast area, and frequent tillage is more likely to
442 cause water and soil erosion. The occurrence of water and soil erosion is mainly
443 triggered by human factors.

444 (3) Moderate susceptibility zone of ground subsidence

445 This zone is mainly distributed in Shunde District, the northwest area of Zhongshan
446 City, the eastern area of Doumen District and the central area of Sanshui District. This
447 zone is located in delta plain area. The outcropped lithology is mainly sandstone
448 group. The mollisol with a multi-layer structure and large thickness is widely
449 distributed, and the thickness of mollisol range from 5 m to 20 m. Much exploiting of
450 groundwater causes lowering of groundwater table, resulting in form of depression cone
451 in exploiting region, which causing compression and consolidation of Quaternary
452 sand layer. The original balance of rock and soil mechanics has been artificially
453 changed under human engineering activities, causing ground subsidence.

454 (4) Moderate susceptibility zone of karst collapse

455 This zone is mainly distributed in Dinghu District, the adjacent area between Sihui
456 City and Shanshui District, Guangdong City, Kaiping City and the northwest marginal
457 area of Taishan City. This zone is dominated by the delta plain and platform,
458 characterized by flat terrain and low ground elevation. Engineering geological
459 conditions is complex, the lithology consists of clastic rock group, red clastic rock
460 group, and volcanic intrusive rock, with strong erosion. The karst is distributed in
461 parts area of this zone. Much exploiting of groundwater and mining causes the change
462 of groundwater table, which is major reason to trigger karst collapse.

463 **4.2.3 Low susceptibility zones**

464 (1) Low susceptibility zone of collapses and landslides



465 This zone is mainly distributed in Conghua District, Boluo County, Jianglin Town,
466 Fanyu District and Jinji Town. This zone is dominated by low mountains and hills,
467 and ground elevation is less than 100 m. The outcropped lithology is composed of
468 intrusive rocks and metamorphic rocks. The engineering geological condition is
469 simple. The annual precipitation is less than mean annual precipitation for the entire
470 study area. Thus, it is not prone to collapses and landslides.

471 (2) Low susceptibility zone of water and soil erosion

472 This zone is mainly distributed in Liangxi Town, Longsheng Town, Taishan City, Yaxi
473 Town, Doumen District, Foshan City and Yangcun Town. This zone is dominated by
474 low mountains and hills. The outcropped lithology consists of sandstone group and
475 intrusive rocks. This zone is characterized by weak soil erosion, small river system
476 and large vegetation coverage. Water and soil erosion occurred in few areas of this
477 zone and is caused by human activities.

478 (3) Low susceptibility zone of geological hazards

479 This zone is prone to collapses, landslides, karst collapses and water and soil erosion.
480 This zone is mainly distributed in Foshan City, the northern area of Dongguan City,
481 Chenjiang Town, the northern area of Shunde District, and Gaoming District. The
482 topography consists of low mountains, hills, platform and delta plain. This zone is
483 characterized by small slope and developed geological structure. But human
484 engineering activities are weak and precipitation is small. Thus, it is not prone to
485 trigger geological hazards.

486 **4.2.3** Insusceptible zone of geological hazards

487 This zone is mainly distributed in the northwest area of the study area, Enping City,
488 Shalan Town and Boluo County, it extends for 107 km², accounting for 8.1% of the
489 study area. This zone is located in hilly area. The outcropped lithology consists of
490 metamorphic rocks and intrusive rocks. This zone is characterized by small
491 population density, large vegetation coverage and weak intensity of human activities,
492 which has weak destruction on geological environment. Moreover, few geological
493 hazards are found in this zone and hazards events keep away from residential areas,
494 which has a weaker threat to the life and property of local residents.

495 **5 Analysis of the causes of geo-hazards**

496 **5.1 Composition conditions**

497 Topography. The geological hazards that are greatly affected by topography are



498 collapses and landslides within the study area. In the study area, the collapses and
499 landslides are founded in low mountains and hilly area, karst collapses occur in the
500 karst development area, water and soil erosion occur in hilly area and platform, and it
501 mostly occur in the slope with 15° - 30° .

502 Stratigraphic lithology. The study area is widely distributed with loose
503 alluvial-diluvial layer, eluvium layer, swell-shrinkage soil and colluvial soil, loose
504 rocks is characterized by weak lithology and low shear strength. So it is susceptible to
505 collapses, landslides and other geo-hazards under influence of triggering factors.
506 Concealed karst is more developed, so it is prone to ground collapse under the action
507 of human activity. The mollisol is characterized by high water content, high
508 compressibility, low shear strength and low bearing capacity, so it is prone to ground
509 subsidence and mollisol foundation subsidence. Weathering residual soil has poor
510 corrosion resistance, and it is easy to collapse in case of water, so it is prone to water
511 and soil erosion.

512 Geologic structure. It is susceptible to cause collapses in some area, characterized by
513 strong tectonic movement, broken stratum and frequent earthquake.

514 **5.2 triggering factors**

515 (1) Precipitation

516 There are more geological hazards can be found in some areas with large precipitation.
517 In areas with large annual precipitation, the surface runoff is very strong and the slope
518 toe are deeply cut by the rivers resulting in formation of temporary surface. The
519 precipitation can increase pressure of pore water in soil body and reduce the shear
520 strength of soil body, result that the slope is prone easily destabilized and destructed.
521 The rainfall for the study area is abundant and has a unevenly temporal distribution.
522 The raindrop has strong the scouring effect and erosion on ground during rainfall,
523 resulting in water and soil erosion. Table 3 shows the quarterly distribution
524 characteristics of collapses during the recent 15 years within the typical area of the
525 study area. From table 3, it is indicated that collapses primarily occurred in the rainy
526 season from June to September, and it maintains consistency with the distribution of
527 monthly precipitation.

528

529 <Table 3>

530



531 (2) Human activities

532 Unreasonable human activities are important factors for causing frequent occurrence
533 of geological hazards such as collapses, landslides, ground subsidence, ground
534 collapse and so on. In the study area, slope cutting effect under demand of building
535 houses and road construction have a major impact on the formation of geological
536 hazard. Human activities such as excavating the slope toe and cutting slope can
537 change the stress state of the original balance of mountain slope and destroy
538 vegetation of the slope, so it is easily trigger collapses and landslides. Large-scale
539 high-rise building construction, exploitation of underground space and other major
540 projects applied static load on foundation, which can change the stress balance of
541 engineering foundation and make the soil body of foundation creep, and it cause the
542 compaction and deformation of soil body. Finally, it will trigger ground collapse and
543 ground subsidence.

544 Over-pumping groundwater is primary factor to cause karst collapse and ground
545 subsidence.

546 **6 Conclusions**

547 The aim of this study is to assess multi-hazard susceptibility and identify different
548 susceptibility area in the Pearl River Delta Economic Region, where various hazards
549 occurred. This paper presents a first attempt to propose an new method that integrated
550 the Analytic Hierarchy Process (AHP) and the Difference Method (DM) to assess
551 multi-hazard susceptibility. Based on the geo-hazards investigation and local geological
552 environmental conditions, this paper systematically analyzes the occurrence
553 mechanism and formation conditions of geological hazards and summarizes the causal
554 factors for controlling occurrence of geological hazards. And based on the above
555 analysis process, individual geo-hazard susceptibility is assessed by applying the
556 Analytic Hierarchy Process (AHP) and spatial analysis of MapGIS. the multi-hazard
557 susceptibility is assessed by the Difference Method (DM) based on above individual
558 geo-hazard susceptibility result, and the assessment results are plotted in a
559 susceptibility-zoning map of multi-hazard on MapGIS 6.7 platform.

560 The multi-hazard susceptibility map shows most of areas of the study area are under
561 the middle and low susceptibility zones, accounting for 75.2% of the toatl study area.
562 High susceptibility zone covers an area of 6662.24 km², accounting for 16.5% of the
563 study area, where geo-hazards are likely to occur due to poor geological environment



564 and strong human activities. Moderate susceptibility zone covers an area of 16806.91
565 km², accounting for 41.6% of the entire study area, remaining area are under low
566 susceptibility zone and insusceptible zone, accounting for 41.9% of the entire study
567 area. From multi-hazard susceptibility map, geological hazards events are distributed
568 in corresponding susceptibility zone, which verifies the accuracy of new method and
569 indicated that this method suits the study area. This study can provide theoretical
570 guide to urban planning and geo-hazards management for achieving the optimal
571 allocation of geological resources and environment, and it can be combined with
572 present land-use map to provide scientific basis to adjust land use planning, coming
573 true the rational use of land resources.
574



575 **References:**

- 576 Bijukchhen, S. M., Kayastha, P. and Dhital, M. R.: A comparative evaluation of
577 heuristic and bivariate statistical modelling for landslide susceptibility mappings in
578 Ghurmi-Dhad Khola, east Nepal. *Arab J Geosci*, 6(8), 2727–2743, 2013.
- 579 Cui, A. P.: Application of Information System Spatial Analysis and Attacking
580 Coefficient Method to the Classification of Geological hazards in Lueyang County,
581 *Journal of Catastrophology*, (02), 53-57, 2004 [in Chinese].
- 582 Lee, C. Fang., Huang, W. K., Chang, Y. L., Chi, S. Y. and Liao, W. C.: Regional
583 landslide susceptibility assessment using multi-stage remote sensing data along the
584 coastal range highway in northeastern Taiwan, *Geomorphology*, 300, 113-127, 2018.
- 585 Degg, M.: Natural hazards: Recent trends and future prospects, *Geography*, 198-209,
586 1992.
- 587 Deng, X. Y. and Yi, S. M.: Space-Time Distribution Characteristics of Rockfall
588 Hazard Activities in Guangdong, *Chinese Journal of Engineering Geophysics*, 5(3),
589 356-363, 2008 (in Chinese).
- 590 Fu, Y. C., Wu, S. T., Zhang, Q. and Shi, L.: The susyitition of the carst forecasting
591 and evaluating methods based on the GIS, *Geology of Chemical Minerals*, 31(4),
592 227-231, 2009 (in Chinese).
- 593 Karaman, H.: Integrated multi-hazard mapcreation by using AHP and GIS, 7th
594 International Conference on Natural Hazards (NAHA '15), 40, 101-110, 2015.
- 595 Karaman, H. and Erden, T.: Net earthquake hazard and elements at risk (NEaR) map
596 creation for city of Istanbul via spatial multi-criteria decision analysis, *Nat. Hazards*,
597 73 (2), 685 – 709, 2014.
- 598 Komac, M.: A landslide susceptibility model using the analytical hierarchy process
599 method and multivariate statistics in perialpine Slovenia, *Geomorphology*, 74(1), 17
600 – 28, 2006.
- 601 Li, J. X.: Study on the relationship between geological hazards and geological
602 environment in Guangdong Province, *West-China Exploration Engineering*, (8),
603 111-113+117, 2012.
- 604 Liu, D. J.: The situation and analysis of salinity intrusion in coastal areas, China,
605 *Journal of Geological Hazards and Environment Preservation*, 15(1), 31-36, 2014.
- 606 Li, B. Y., Li, J. Z. and Wang, J. J.: Areal association of natual hazard in China, *Acta*
607 *Geographica Sinica*, 51(1), 1-2, 1996 (in Chinese).



- 608 Liang, S. Y., Wang, Y. X. and Wang, Y.: Risk assessment of geological hazard in
609 Wudu area of Longnan City, China. *Applied Mechanics and Materials*; 39, 232-237,
610 DOI:10.4028/www.scientific.net/AMM.39.232, 2011.
- 611 National Disaster Mitigation Center Disaster Information Department.: The
612 characteristic features of natural disasters in China, *Disaster Reduct China*, 1, 10-11,
613 2009.
- 614 Wang, N. T., Shi, T. T., Ke, P., Wei, Zhang. and Jin, X. W.: Assessment of geohazard
615 susceptibility based on RS and GIS analysis in Jianshi County of the Three Gorges
616 Reservoir, China, *Arab J Geosci*, 8, 67-86, DOI 10.1007/s12517-013-1196-7, 2015.
- 617 Peng, S.H., Shieh, M.J. and Fan, S.Y.: Potential hazard map for disaster prevention
618 using GIS-based linear combination approach and analytic hierarchy method. *J. Geogr.*
619 *Inf. Syst*, 4, 403 – 411.
- 620 Pradhan, A. M. S. and Kim, Y. T.: Evaluation of a combined spatial multi-criteria
621 evaluation model and deterministic model for landslide susceptibility mapping,
622 *Catena*, 140: 125–139, 2016..
- 623 Rozos, D., Bathrellos, G. D. and Skilodimou, H. D.: Comparison of the
624 implementation of rock engineering system (RES) and analytic hierarchy process
625 (AHP) methods, based on landslide susceptibility maps, compiled in GIS environment.
626 A case study from the eastern Achaia County of Peloponnesus, Greece, *Environ. Earth*
627 *Sci*, 63 (1), 49 – 63, 2011.
- 628 Saaty, T. L.: Decision making with the analytic hierarchy process, *International*
629 *Journal of Services Sciences*, 1(1), 83-98, 2008.
- 630 Saaty, T. L.: The analytic hierarchy process: planning, priority setting, resource
631 allocation. New York, USA: McGraw-Hill, 2008.
- 632 Su, W. C.: Karst collapse hazards research and prevention in major cities of Guizhou
633 Province, *Hydrogeology Engineering Geology*, 25(3), 40-42, 1998 (in Chinese).
- 634 Tang, B. X. and Wu, J. S: Mountain natural hazards dominated (mainly debris flow)
635 and their prevention, *Journal of Geographical Sciences*, (2), 202 – 209, 1990 (in
636 Chinese).
- 637 Uitto, J. I. and Shaw, R.: Sustainable development and disaster risk reduction:
638 Introduction. In: *Sustainable Development and Disaster Risk Reduction*. Springer
639 Japan, 1–12, 2016.
- 640 Wang, B., He, K. Q. and Gao, Z. J.: Temporal and Spatial Analysis of Karst Collapse



- 641 Development, *Hydrogeology Engineering Geology*, 28(5), 24-27, 2001 (in Chinese).
- 642 Wang, L., Guo, M., Sawada, K. et al.: Landslide susceptibility mapping in Mizunami
643 City, Japan: A comparison between logistic regression, bivariate statistical analysis
644 and multivariate adaptive regression spline models, *Catena*, 135, 271 - 282, 2015.
- 645 Yilmaz, I.: Landslide susceptibility mapping using frequency ratio, logistic regression,
646 artificial neural networks and their comparison: a case study from Kat landslides
647 (Tokat - Turkey), *Computers & Geosciences*, 35(6), 1125-1138, 2009.
- 648 Zhou, J. X., Wang, L. X., Xie, B. Y. et al.: A study on the early-warning technique
649 concerning debris flow hazards, *Journal of Geographical Sciences*, 12(3), 363-370,
650 2002.
- 651 Sun, Z. X., Chen, J., Xie, Q. and Long, A. M.: Status Quo of Seawater Intrusion in
652 Western Coastal Area of Pearl River Estuary, Survey and Diagnosis. *Environmental
653 Science & Technology*, 34(8), 81-84, 2011 (in Chinese).
- 654 Zhang, W.: Space distribution regularity of geo-hazards in Guangdong province,
655 *Journal of Green Science and Technology*, 7, 221-223, 2012 (in Chinese).
- 656 UN.: Johannesburg plan of implementation of the world summit on sustainable
657 development, Technical report, United Nations, 2002.
- 658



659 **Table 1 Value of RI**

Order n	1	2	3	4	5	6	7	8	9
RI	0.00	0.00	0.58	0.90	1.12	1.24	1.32	1.41	1.45

660

661 **Table 2**

662 **Assessment factor system of geological hazards susceptibility**

663

Criterion layer	Evaluation index	The score and rank of assessment indexes				Weight	
		1	2	3	4		
Karst collapse	Degree of karst development	Strong	Moderate	Poor	—	0.2100	
	Overburden thickness (m)	<10	10-30	>30	—	0.3211	
	Lithology	Limestone,dolomite	Glutenite,mud limestone,tuff, sandstone	Clay rock, mudstone, shale, silty sandstone, silty slate	—	0.2100	
	Aquifer water yield property	Weak	Moderate	rich	—	0.1001	
	The distance to the fracture	0-2000	2000-4000	>4000	—	0.1587	
Collapse and landslide	Topography	Delta plain,marine deposition terrace	Alluvial plains, alluvial and diluvial plains, alluvial and marine deposition plains	Hilly area	Low mountainous area	0.3300	
	Lithology	Pluton, shale	Medium - thick layered carbonate rocks,	layered metamorphic, layered	clastic rocks	0.3300	
	The distance to faults	<1000	1000-2000	2000-3000	>3000	0.1996	
	Precipitation	<1600	1600-1800	1800-2000	>2000	0.1404	
Ground subsidence	The thickness of deposition	<10	10~20	>20	—	0.4249	
	Aquifer water yield property	Weak	moderate	rich	—	0.2701	
	The deposition age of millisol	Holocene alluvial group, the Pleistocene middle	nemarine sea Guizhou group, the upper middle	Holocene alluvia Dawan - the Holocene lake marsh	Holocene alluvial group, red bed residual soil	—	0.1613
	The distance to the fracture	<2000	2000-4000	>4000	—	0.1438	
	Water and soil erosion	Topography	Delta plain,marine deposition terrace	Alluvial Plains, alluvial and diluvial plains, alluvial and marine deposition plains	Hilly area	Low mountainous area	0.2140
Vegetation type		Arbor,shrub	Economic forest,shelterbelt,	forest, crops	Unused land	0.2499	
Soil type		Paddy soil	Red loam	Fluvo-aquic soil	Latosolic soil	red0.3079	
Precipitation the density of river network		<1800	1800-2000	2000-2200	>2200	Concentrated	0.1191 0.1092



seawater intrusion	Topography	Delta plain, marine deposition terrace	Alluvial plains, alluvial and diluvial plains	hilly area	Low mountainous area	0.1438
	The type of Quaternary sedimentary rock	Bedrock	Holocene lacustrine sediment colluvium	Holocene marine clay	Holocene sea alluvial clay	0.1613
	Groundwater table	<0	0-10	10-60	>60	0.2701
	Precipitation	<1800	1800-2000	2000-2200	>2200	0.4249

664

665 **Table 3**

666 **The quarterly distribution characteristics of collapses in the study area between 1990 and**
 667 **2006**

Time City	Jan - March		Apr - Jun		July - Sep		Oct - Dec	
	Number	Percentage	Number	Percentage	Number	Percentage	Number	Percentage
Zhaoqing City	13	6.88	51	26.98	97	51.32	28	14.82
Huizhou City	3	3.06	22	22.45	61	62.25	12	12.25
Guangzhou City	11	3.77	102	34.93	162	55.48	17	5.82
Shenzhen City	19	4.97	60	15.71	278	72.78	25	6.55

668